

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



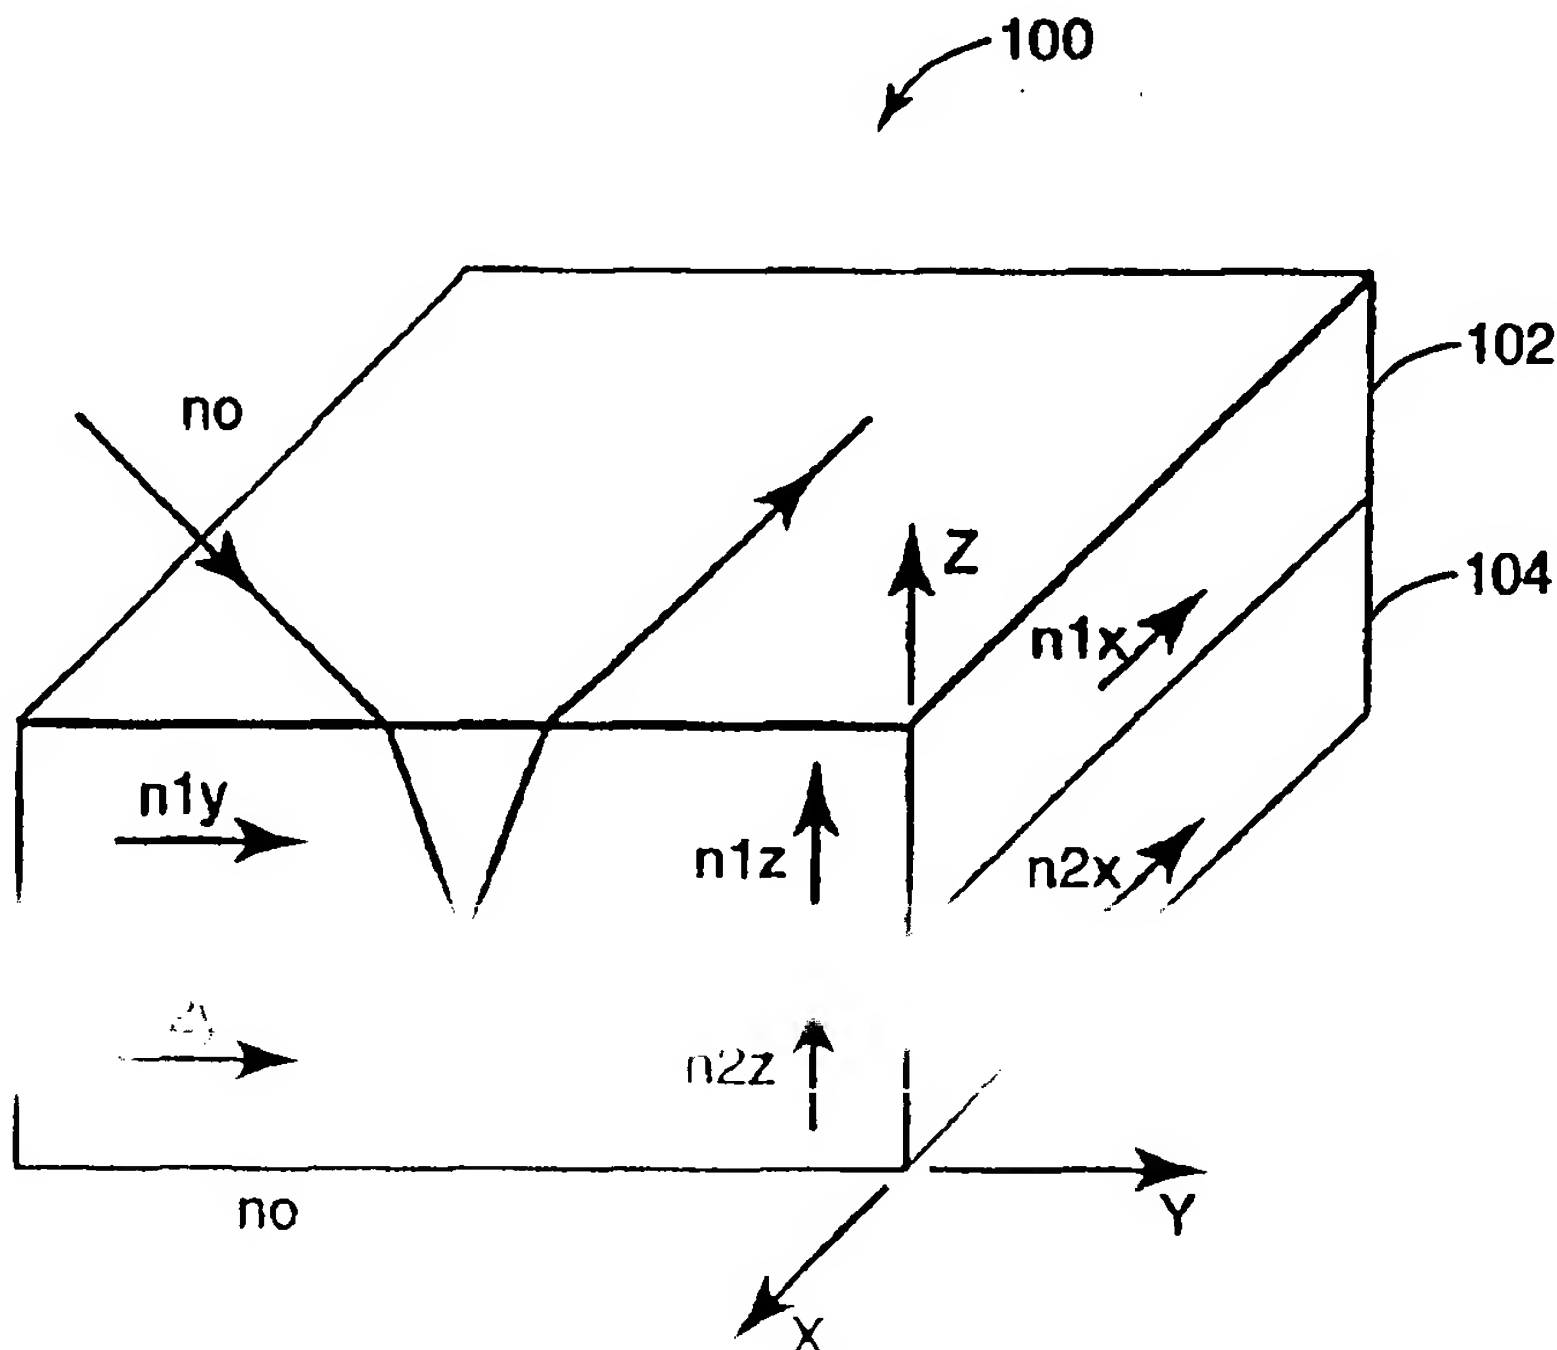
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B 1/10, 5/08		A1	(11) International Publication Number: WO 97/01774
			(43) International Publication Date: 16 January 1997 (16.01.97)
(21) International Application Number: PCT/US96/10338 (22) International Filing Date: 13 June 1996 (13.06.96) (30) Priority Data: 08/494,366 26 June 1995 (26.06.95) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: WEBER, Michael, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). WORTMAN, David, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). OUDERKIRK, Andrew, J.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). COBB, Sanford, Jr.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: BARTINGALE, Kari, H. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: HIGH EFFICIENCY OPTICAL DEVICES

(57) Abstract

Optical devices according to the present invention include a multilayer optical film in which at least one of the layers comprises an oriented birefringent polymer. The multilayer optical film exhibits low absorptivity and can reflect light approaching at shallow angles as well as normal to the film.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo				
	Czechia				
	Dominican Republic				
	Ecuador				
	El Salvador				
	France				
	Germany				
	Ghana				
	Greece				
	Hungary				
	Iceland				
	India				
	Indonesia				
	Israel				
	Italy				
	Japan				
	Kazakhstan				
	Kenya				
	Korea, Democratic People's Republic of				
	Korea, Republic of				
	Kyrgyzstan				
	Latvia				
	Lithuania				
	Luxembourg				
	Madagascar				
	Malawi				
	Malaysia				
	Mali				
	Moldova, Republic of				
	Mongolia				
	Monrovia				
	Morocco				
	Mozambique				
	Netherlands				
	Niger				
	Nigeria				
	Norway				
	New Zealand				
	Pakistan				
	Poland				
	Portugal				
	Romania				
	Russian Federation				
	Saudi Arabia				
	Senegal				
	Sierra Leone				
	Slovakia				
	Slovenia				
	South Africa				
	Spain				
	Sweden				
	Switzerland				
	Taiwan				
	Tanzania				
	Togo				
	Tajikistan				
	Trinidad and Tobago				
	Ukraine				
	United States of America				
	Uzbekistan				
	Viet Nam				

HIGH EFFICIENCY OPTICAL DEVICES

Field of the Invention

The present invention relates to the field of optical devices. More particularly, the present invention relates to optical devices employing multi-layer optical film as reflectors and/or polarizers.

Background of the Invention

Optical devices employing reflectors are used, for example, in displays for laptop computers, hand-held calculators, digital watches and similar devices as well as illuminated signs, light pipes, backlight assemblies and many other devices.

Conventional reflectors, including pigmented surfaces, silvered mirrors, polished metallic or metallized surfaces, etc. suffer from a number of disadvantages in many applications. The conventional reflectors suffer from relatively high absorbance of light incident on their surfaces, typically absorbing about 4-10% of the light incident on them. As a result, the amount of light remaining after each reflection is less than that initially provided. In devices in which multiple reflections are encountered, the overall output of the optical device can be substantially limited.

In addition, many of the conventional reflectors are too bulky and/or heavy for many of the applications, particularly in laptop computer displays and other portable devices.

Many optical devices use polarizers, either alone or in combination with reflectors, to provide light having substantially one plane of polarization. Polarized light is especially useful in conjunction with liquid crystal (LC) displays used in many portable devices such as laptop computers and watches, because the LC displays rely on polarized light passing through the LC to display information to a

typical absorptive polarizers are oriented dyed polymer films, while typical

reflective polarizers are tilted thin film polarizers, also known as MacNeille polarizers. Absorptive polarizers do, of course, contribute to the absorptive losses of optical devices in which they are used, thereby limiting the output of those devices.

5 The absorptive losses of known reflectors and polarizers become much more important when the optical devices are used with a brightness enhancement film such as micro-replicated brightness enhancement film or any other type of reflective polarizer which causes light to typically travel through several reflections, thereby amplifying absorptive losses with every reflection. In the highest gain
10 configurations, for, e.g., a single sheet of brightness enhancement film in combination with a reflective polarizer and back reflector, or two sheets of orthogonally crossed sheets of brightness enhancement film, the effective absorptive losses can reduce the total potential light output of an optical display by 10-30%.

 This principle of absorptive losses also applies to optical devices employing
15 non-totally internally reflecting surfaces. One example is an optical wedge in which light is directed into a structure having converging reflective surfaces. Optical wedges will typically reflect light many times before it exits the device. With each reflection, however, some of the light which entered the wedge is absorbed by conventional reflectors. As a result, the amount of light exiting the device is
20 typically substantially less than the light entering the device.

 Another optical device typically employing reflective surfaces is an illuminated sign which relies on a finite number of light sources and multiple reflections within an optical cavity to disperse the light to illuminate the surface of a sign in a generally uniform manner. To overcome the problems associated with
25 absorptive losses, many signs typically employ numerous light sources, thereby increasing the cost to manufacture and operate the signs.

 Yet another optical device which is limited by absorption losses is a light pipe in which light enters the pipe and is reflected along its length numerous times

 conventional reflectors are used, thereby limiting throughput of the light pipe

To overcome some of the problems of weight, bulk and absorption of conventional reflectors, multi-layered polymer films have been used to reflect and/or polarize light. Such polymeric films are, however, subject to a number of other disadvantages including iridescence, as well as poor reflectivity when off-axis light approaches the surface of the film. The off-axis light is typically transmitted through the films, rather than being reflected, thereby resulting in transmissive losses rather than absorptive losses. Whether light is lost through absorption or transmission, however, the output of the optical device is limited.

Other problems with known multi-layer polymer films used to provide reflectors and/or polarizers is that the materials and methods used to manufacture the films presents serious problems due to poor optical transmission, extrudibility, and high costs.

Summary of the Invention

Optical devices according to the present invention include a multilayer optical film. Optical devices incorporating multilayer optical film according to the present invention enjoy many advantages due to the low absorptivity of the film and its ability to reflect light approaching at shallow angles as well as normal to the film.

In those situations where complete reflectivity is desired, optical devices employing a multilayer optical film according to the present invention can reflect over 99% of the light striking the surface of the film.

If a reflective polarizer is desired, the optical devices can be constructed with a multilayer optical film which transmits a significant amount of light having one plane of polarization while reflecting a significant amount of light having an orthogonally oriented polarization. A further advantage is that the relative percentages of transmitted/reflected light can be largely controlled by the multilayer optical film used in the present invention.

As a result of the unique properties of the multilayer optical film, optical devices can be constructed which transport and/or transmit light of one polarization, whether the light is incident normal to the film surface or off-axis.

Another advantage of optical devices employing multilayer optical film according to the present invention which rely on reflection to transport light is that the devices need not have symmetry to reduce the number of reflections needed to transmit light due to the low absorptivity of the multilayer optical film.

5 Yet another advantage of optical devices employing multilayer optical films according to the present invention is their relatively low weight as compared to many conventional reflectors and/or polarizers.

Still another advantage of optical devices employing multilayer optical films according to the present invention is that because the film is relatively thin as
10 compared to many conventional reflectors and/or polarizers, the optical devices can be manufactured to occupy limited space in a system employing the device.

Additional features and advantages of optical devices according to the present invention will be apparent upon reading the detailed description of illustrative embodiments below.

15

Brief Description of the Drawings

Figures 1a and 1b are diagrammatical views of the multilayer optical film of the present invention.

Figure 2 depicts a two layer stack of films forming a single interface.

20 Figures 3-6, 7A and 7B depict the optical performance of multilayer optical films described in Examples 1-5.

Figure 8 is a graphical representation illustrating the relationship between the number of reflections experienced by a ray of light (x-axis) as compared to the relative intensity of the light ray (y-axis) for reflective surfaces made of multilayer
25 optical film and a standard reflector.

Figure 9 is schematic cross-sectional diagram of an alternate optical device according to the present invention.

Figure 10 is a perspective view of the optical device of Figure 9 in which at

Figure 11 is a schematic cross-sectional diagram of a converging wedge optical device according to the present invention.

Figure 12 is a schematic cross-sectional diagram of a diverging wedge optical device according to the present invention.

Figure 13 is a schematic cross-sectional diagram of a light pipe employing multilayer optical films according to the present invention.

5 Figure 14 is a schematic cross-sectional diagram of the device of Figure 13, taken along a plane transverse to the longitudinal axis of the light pipe.

Figure 15 is a perspective view of one illustrative optical device constructed using multilayer optical films according to the present invention.

10 Detailed Description of Illustrative Embodiments of the Invention

I. Multilayer Optical Film

The optical devices described herein rely on the unique and advantageous properties of multilayer optical films. The advantages, characteristics and
15 manufacturing of such films are most completely described in the above mentioned copending and commonly assigned U.S. Patent Application 08/402,041, filed March 10, 1995, titled OPTICAL FILM. The multilayer optical film is useful, for example, as highly efficient mirrors and/or polarizers. A relatively brief description of the properties and characteristics of the multilayer optical film is presented below
20 followed by a description of illustrative embodiments of backlight systems using the multilayer optical film according to the present invention.

Multilayer optical films as used in conjunction with the present invention exhibit relatively low absorption of incident light, as well as high reflectivity for off-axis as well as normal light rays. These properties generally hold whether the films
25 are used for pure reflection or reflective polarization of light. The unique properties and advantages of the multi-layer optical film provides an opportunity to design highly efficient backlight systems which exhibit low absorption losses when compared to known backlight systems.

Figure 12 and 13 includes a multilayer stack having alternating layers of at least two materials 12 and 14. At least one of the materials has the property of

Multilayer optical films constructed according to the present invention exhibit a Brewster angle (the angle at which reflectance goes to zero for light incident at any of the layer interfaces) which is very large or is nonexistent. In contrast, known multilayer polymer films exhibit relatively small Brewster angles at layer interfaces, resulting in transmission of light and/or undesirable iridescence. The multilayer optical films according to the present invention, however, allow for the construction of mirrors and polarizers whose reflectivity for p polarized light decrease slowly with angle of incidence, are independent of angle of incidence, or increase with angle of incidence away from the normal. As a result, multilayer stacks having high reflectivity for both s and p polarized light over a wide bandwidth, and over a wide range of angles can be achieved.

tical effects for a wide variety of circumstances and applications. The indices of

refraction of the layers in the multilayer stack can be manipulated and tailored to produce the desired optical properties.

Referring again to Figure 1B, the multilayer stack 10 can include tens, hundreds or thousands of layers, and each layer can be made from any of a number of different materials. The characteristics which determine the choice of materials for a particular stack depend upon the desired optical performance of the stack. The stack can contain as many materials as there are layers in the stack. For ease of manufacture, preferred optical thin film stacks contain only a few different materials.

10 The boundaries between the materials, or chemically identical materials with different physical properties, can be abrupt or gradual. Except for some simple cases with analytical solutions, analysis of the latter type of stratified media with continuously varying index is usually treated as a much larger number of thinner uniform layers having abrupt boundaries but with only a small change in properties
15 between adjacent layers.

The preferred multilayer stack is comprised of low/high index pairs of film layers, wherein each low/high index pair of layers has a combined optical thickness of $1/2$ the center wavelength of the band it is designed to reflect. Stacks of such films are commonly referred to as quarterwave stacks. For multilayer optical films
20 concerned with the visible and the near infrared wavelengths, a quarterwave stack design results in each of the layers in the multilayer stack having an average thickness of not more than 0.5 microns.

In those applications where reflective films (e.g. mirrors) are desired, the desired average transmission for light of each polarization and plane of incidence
25 generally depends upon the intended use of the reflective film. One way to produce a multilayer mirror film is to biaxially stretch a multilayer stack which contains a birefringent material as the high index layer of the low/high index pair. For a high efficiency reflective film average transmission along each stretch direction at normal incidence, for example, is preferably less than 5% (reflectance greater than 95%), more preferably less than 2% (reflectance greater than 98%), and even more
30 reflectance greater than 90%), preferably less than 5% (reflectance greater than 95%), more preferably less than 2% (reflectance greater than 98%), and even more

preferably less than 1% (reflectance greater than 99%). The average transmission at 60 degrees from the normal from 400-700 nm is desirably less than 20% (reflectance greater than 80%), preferably less than 10% (reflectance greater than 90%), more preferably less than 5% (reflectance greater than 95%), and even more preferably less than 2% (reflectance greater than 98%), and even more preferably less than 1% (reflectance greater than 99%).

In addition, asymmetric reflective films may be desirable for certain applications. In that case, average transmission along one stretch direction may be desirably less than, for example, 50%, while the average transmission along the other stretch direction may be desirably less than, for example 20%, over a bandwidth of, for example, the visible spectrum (400-700 nm), or over the visible spectrum and into the near infrared (e.g, 400-850 nm).

Multilayer optical films can also be designed to operate as reflective polarizers. One way to produce a multilayer reflective polarizer is to uniaxially stretch a multilayer stack which contains a birefringent material as the high index layer of the low/high index pair. The resulting reflective polarizers have high reflectivity for light with its plane of polarization parallel to one axis (in the stretch direction) for a broad range of angles of incidence, and simultaneously have low reflectivity and high transmissivity for light with its plane of polarization parallel to the other axis (in the non-stretch direction) for a broad range of angles of incidence. By controlling the three indices of refraction of each film, n_x , n_y and n_z , the desired polarizer behavior can be obtained.

For many applications, the ideal reflecting polarizer has high reflectance along one axis (the so-called extinction axis) and zero reflectance along the other (the so-called transmission axis), at all angles of incidence. For the transmission axis of a polarizer, it is generally desirable to maximize transmission of light polarized in the direction of the transmission axis over the bandwidth of interest and also over the range of angles of interest

transmission axis across the visible spectrum (400-700 nm for a bandwidth of 300 nm) is desirably at least 50%, preferably at least 70%, more preferably at least

85%, and even more preferably at least 90%. The average transmission at 60 degrees from the normal (measured along the transmission axis for p-polarized light) for a polarizer from 400-700 nm is desirably at least 50%, preferably at least 70%, more preferably at least 80%, and even more preferably at least 90%.

5 The average transmission for a multilayer reflective polarizer at normal incidence for light polarized in the direction of the extinction axis across the visible spectrum (400-700 nm for a bandwidth of 300 nm) is desirably at less than 50%, preferably less than 30%, more preferably less than 15%, and even more preferably less than 5%. The average transmission at 60 degrees from the normal (measured
10 along the transmission axis for p-polarized light) for a polarizer for light polarized in the direction of the extinction axis from 400-700 nm is desirably less than 50%, preferably less than 30%, more preferably less than 15%, and even more preferably less than 5%.

For certain applications, high reflectivity for p-polarized light with its plane
15 of polarization parallel to the transmission axis at off-normal angles are preferred. The average reflectivity for light polarized along the transmission axis should be more than 20% at an angle of at least 30 degrees from the normal.

In addition, although reflective polarizing films and asymmetric reflective
20 films are discussed separately herein, it should be understood that two or more of such films could be provided to reflect substantially all light incident on them (provided they are properly oriented with respect to each other to do so). This construction is typically desired when the multilayer optical film is used as a reflector in a backlight system according to the present invention.

If some reflectivity occurs along the transmission axis, the efficiency of the
25 polarizer at off-normal angles may be reduced. If the reflectivity along the transmission axis is different for various wavelengths, color may be introduced into the transmitted light. One way to measure the color is to determine the root mean square (RMS) value of the transmissivity at a selected angle or angles over the

efficiency angle here determine
30 according to the equation

$$C_{RMS} = \frac{\int_{\lambda_1}^{\lambda_2} ((T - \bar{T})^2)^{1/2} d\lambda}{\bar{T}}$$

where the range λ_1 to λ_2 is the wavelength range, or bandwidth, of interest, T is the transmissivity along the transmission axis, and \bar{T} is the average transmissivity along the transmission axis in the wavelength range of interest. For applications
 5 where a low color polarizer is desirable, the % RMS color should be less than 10%, preferably less than 8%, more preferably less than 3.5%, and even more preferably less than 2% at an angle of at least 30 degrees from the normal, preferably at least 45 degrees from the normal, and even more preferably at least 60 degrees from the normal.

10 Preferably, a reflective polarizer combines the desired % RMS color along the transmission axis for the particular application with the desired amount of reflectivity along the extinction axis across the bandwidth of interest. For polarizers having a bandwidth in the visible range (400-700 nm, or a bandwidth of 300 nm), average transmission along the extinction axis at normal incidence is desirably less
 15 than 40%, more desirably less than 25%, preferably less than 15%, more preferably less than 5% and even more preferably less than 3%.

Materials Selection and Processing

With the design considerations described in the above mentioned U.S.
 20 Patent Application Serial Number 08/402,041, one of ordinary skill will readily appreciate that a wide variety of materials can be used to form multilayer reflective films or polarizers according to the invention when processed under conditions selected to yield the desired refractive index relationships. The desired refractive index relationships can be achieved in a variety of ways, including stretching during
 25 or after film formation (e.g., in the case of organic polymers), extruding (e.g., in the case of liquid crystalline materials), or coating. In addition, it is preferred that the materials can be co-extruded.

In general, appropriate combinations may be achieved by selecting, as the first material, a crystalline or semi-crystalline material, preferably a polymer. The second material, in turn, may be crystalline, semi-crystalline, or amorphous. The second material may have a birefringence opposite of the first material. Or, the
5 second material may have no birefringence, or less birefringence than the first material.

Specific examples of suitable materials include polyethylene naphthalate (PEN) and isomers thereof (e.g., 2,6-, 1,4-, 1,5-, 2,7-, and 2,3-PEN), polyalkylene terephthalates (e.g., polyethylene terephthalate, polybutylene terephthalate, and
10 poly-1,4-cyclohexanedimethylene terephthalate), polyimides (e.g., polyacrylic imides), polyetherimides, atactic polystyrene, polycarbonates, polymethacrylates (e.g., polyisobutyl methacrylate, polypropylmethacrylate, polyethylmethacrylate, and polymethylmethacrylate), polyacrylates (e.g., polybutylacrylate and polymethylacrylate), syndiotactic polystyrene (sPS), syndiotactic poly-alpha-methyl
15 styrene, syndiotactic polydichlorostyrene, copolymers and blends of any of these polystyrenes, cellulose derivatives (e.g., ethyl cellulose, cellulose acetate, cellulose propionate, cellulose acetate butyrate, and cellulose nitrate), polyalkylene polymers (e.g., polyethylene, polypropylene, polybutylene, polyisobutylene, and poly(4-methyl)pentene), fluorinated polymers (e.g., perfluoroalkoxy resins,
20 polytetrafluoroethylene, fluorinated ethylene-propylene copolymers, polyvinylidene fluoride, and polychlorotrifluoroethylene), chlorinated polymers (e.g., polyvinylidene chloride and polyvinylchloride), polysulfones, polyethersulfones, polyacrylonitrile, polyamides, silicone resins, epoxy resins, polyvinylacetate, polyether-amides, ionomeric resins, elastomers (e.g., polybutadiene, polyisoprene,
25 and neoprene), and polyurethanes. Also suitable are copolymers, e.g., copolymers of PEN (e.g., copolymers of 2,6-, 1,4-, 1,5-, 2,7-, and/or 2,3-naphthalene dicarboxylic acid, or esters thereof, with (a) terephthalic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane
dicarboxylic acids, and/or (e) cycloalkane dicarboxylic acids (e.g., cyclonhexane dicarboxylic acid)), copolymers of polyalkylene terephthalates (e.g., copolymers of

terephthalic acid, or esters thereof, with (a) naphthalene dicarboxylic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane glycols; (e) cycloalkane glycols (e.g., cyclohexane dimethane diol); (f) alkane dicarboxylic acids; and/or (g) cycloalkane dicarboxylic acids (e.g., cyclohexane dicarboxylic acid)), and styrene copolymers (e.g., styrene-butadiene copolymers and styrene-acrylonitrile copolymers), 4,4'-bibenzoic acid and ethylene glycol. In addition, each individual layer may include blends of two or more of the above-described polymers or copolymers (e.g., blends of sPS and atactic polystyrene). The coPEN described may also be a blend of pellets where at least one component is a polymer based on naphthalene dicarboxylic acid and other components are other polyesters or polycarbonates, such as a PET, a PEN or a co-PEN.

Particularly preferred combinations of layers in the case of polarizers include PEN/co-PEN, polyethylene terephthalate (PET)/co-PEN, PEN/sPS, PET/sPS, PEN/Eastar, and PET/Eastar, where "co-PEN" refers to a copolymer or blend based upon naphthalene dicarboxylic acid (as described above) and Eastar is polycyclohexanedimethylene terephthalate commercially available from Eastman Chemical Co.

Particularly preferred combinations of layers in the case of reflective films include PET/Ecdel, PEN/Ecdel, PEN/sPS, PEN/THV, PEN/co-PET, and PET/sPS, where "co-PET" refers to a copolymer or blend based upon terephthalic acid (as described above), Ecdel is a thermoplastic polyester commercially available from Eastman Chemical Co., and THV is a fluoropolymer commercially available from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

The number of layers in the film is selected to achieve the desired optical properties using the minimum number of layers for reasons of film thickness, flexibility and economy. In the case of both polarizers and reflective films, the number of layers is preferably less than 10,000, more preferably less than 5,000, and

as discussed above, the ability to achieve the desired relationships among the various indices of refraction (and thus the optical properties of the multilayer

film) is influenced by the processing conditions used to prepare the multilayer film. In the case of organic polymers which can be oriented by stretching, the films are generally prepared by co-extruding the individual polymers to form a multilayer film and then orienting the film by stretching at a selected temperature, optionally
5 followed by heat-setting at a selected temperature. Alternatively, the extrusion and orientation steps may be performed simultaneously. In the case of polarizers, the film is stretched substantially in one direction (uniaxial orientation), while in the case of reflective films the film is stretched substantially in two directions (biaxial orientation).

10 The film may be allowed to dimensionally relax in the cross-stretch direction from the natural reduction in cross-stretch (equal to the square root of the stretch ratio); it may simply be constrained to limit any substantial change in cross-stretch dimension; or it may be actively stretched in the cross-stretch dimension. The film may be stretched in the machine direction, as with a length orienter, or in width
15 using a tenter.

The pre-stretch temperature, stretch temperature, stretch rate, stretch ratio, heat set temperature, heat set time, heat set relaxation, and cross-stretch relaxation are selected to yield a multilayer film having the desired refractive index relationship. These variables are inter-dependent; thus, for example, a relatively low
20 stretch rate could be used if coupled with, e.g., a relatively low stretch temperature.

It will be apparent to one of ordinary skill how to select the appropriate combination of these variables to achieve the desired multilayer film. In general, however, a stretch ratios in the range from 1:2 to 1:10 (more preferably 1:3 to 1:7) in the stretch direction and from 1:0.2 to 1:10 (more preferably from 1:0.3 to 1:7)
25 orthogonal to the stretch direction is preferred.

Suitable multilayer films may also be prepared using techniques such as spin coating (e.g., as described in Boese et al., J. Polym. Sci.: Part B, 30:1321 (1992) for birefringent polyimides, and vacuum deposition (e.g., as described by Zang et al., J. Polym. Sci.: Part A, 24:2085 (1986) for organic polymers). The spin coating technique is particularly useful for certain combinations of crystalline organic compounds and inorganic materials.

Exemplary multilayer reflective mirror films and multilayer reflective polarizers will now be described in the following examples.

EXAMPLE 1 (PEN:THV 500, 449, Mirror)

5 A coextruded film containing 449 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. A Polyethylene naphthalate (PEN) with an Intrinsic Viscosity of 0.53 dl/g (60 wt. % phenol/40 wt. % dichlorobenzene) was delivered by one extruder at a rate of 56 pounds per hour and THV 500 (a fluoropolymer available
10 from Minnesota Mining and Manufacturing Company) was delivered by another extruder at a rate of 11 pounds per hour. The PEN was on the skin layers and 50% of the PEN was present in the two skin layers. The feedblock method was used to generate 57 layers which was passed through three multipliers producing an extrudate of 449 layers. The cast web was 20 mils thick and 12 inches wide. The
15 web was later biaxially oriented using a laboratory stretching device that uses a pantograph to grip a square section of film and simultaneously stretch it in both directions at a uniform rate. A 7.46 cm square of web was loaded into the stretcher at about 100°C and heated to 140°C in 60 seconds. Stretching then commenced at 10%/sec (based on original dimensions) until the sample was stretched to about
20 3.5x3.5. Immediately after the stretching the sample was cooled by blowing room temperature air at it.

Figure 3 shows the transmission of this multilayer film. Curve (a) shows the response at normal incidence, while curve (b) shows the response at 60 degrees for p-polarized light.

25

EXAMPLE 2 (PEN:PMMA, 601, Mirror)

A coextruded film containing 601 layers was made on a sequential flat-film-making line via a coextrusion process. Polyethylene Naphthalate (PEN) with an
intrinsic viscosity of 0.53 dl/g (60 wt. % phenol/40 wt. % dichlorobenzene) was delivered by extruder A at a rate of 114 pounds per hour with 64 pounds per hour going to the feedblock and the rest going to skin layers described below. PMMA

(CP-82 from ICI of Americas) was delivered by extruder B at a rate of 61 pounds per hour with all of it going to the feedblock. PEN was on the skin layers of the feedblock. The feedblock method was used to generate 151 layers using the feedblock such as those described in U.S. Patent 3,801,429, after the feedblock two
5 symmetric skin layers were coextruded using extruder C metering about 30 pounds per hour of the same type of PEN delivered by extruder A. This extrudate passed through two multipliers producing an extrudate of about 601 layers. U.S. Patent 3,565,985 describes similar coextrusion multipliers. The extrudate passed through another device that coextruded skin layers at a total rate of 50 pounds per hour of
10 PEN from extruder A. The web was length oriented to a draw ratio of about 3.2 with the web temperature at about 280°F. The film was subsequently preheated to about 310°F in about 38 seconds and drawn in the transverse direction to a draw ratio of about 4.5 at a rate of about 11% per second. The film was then heat-set at 440°F with no relaxation allowed. The finished film thickness was about 3 mil.

15 As seen in Figure 4, curve (a), the bandwidth at normal incidence is about 350 nm with an average in-band extinction of greater than 99%. The amount of optical absorption is difficult to measure because of its low value, but is less than 1%. At an incidence angle of 50° from the normal both s (curve (b)) and p-polarized (curve (c)) light showed similar extinctions, and the bands were shifted
20 to shorter wavelengths as expected. The red band-edge for s-polarized light is not shifted to the blue as much as for p-polarized light due to the expected larger bandwidth for s-polarized light, and due to the lower index seen by the p-polarized light in the PEN layers.

25 EXAMPLE 3 (PEN:PCTG, 449, Polarizer)

A coextruded film containing 481 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. The feedblock method was used with a 61 layer feedblock and three
die Polymethylene naphthalate (PEN) with an intrinsic viscosity of 0.6 dl/g (0.6 wt. % phenol/40 wt. % dichlorobenzene) was delivered to the feedblock by one

isophthalate and 15% dimethyl terephthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. The PEN skin layers were
5 coextruded on the outside of the optical stack with a total thickness of 8% of the coextruded layers. The optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers were 1.2 and 1.27, respectively. The film was subsequently preheated to 310°F in about 40 seconds and drawn in the transverse direction to a draw ratio of about 5.0 at a rate of 6% per second. The
10 finished film thickness was about 2 mils.

Figure 6 shows the transmission for this multilayer film. Curve a shows transmission of light polarized in the non-stretch direction at normal incidence, curve b shows transmission of p-polarized light at 60° incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. Note the
15 very high transmission of p-polarized light in the non-stretch direction at both normal and 60° incidence (80-100%). Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700nm) shown by curve c. Reflectance is nearly 99% between 500 and 650nm.

20 EXAMPLE 5 (PEN:sPS, 481, Polarizer)

A 481 layer multilayer film was made from a polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.56 dl/g measured in 60 wt. % phenol and 40 wt % dichlorobenzene purchased from Eastman Chemicals and a syndiotactic polystyrene (sPS) homopolymer (weight average molecular weight = 200,000
25 Daltons, sampled from Dow Corporation). The PEN was on the outer layers and was extruded at 26 pounds per hour and the sPS at 23 pounds per hour. The feedblock used produced 61 layers with each of the 61 being approximately the same thickness. After the feedblock three (2x) multipliers were used. Equal thickness layers were produced by the multipliers. The web was drawn after the final multiplier at a total rate of 22 pounds per hour. The web was

extruded through a 12" wide die to a thickness of about 0.011 inches (0.276 mm). The extrusion temperature was 290°C.

This web was stored at ambient conditions for nine days and then uniaxially oriented on a tenter. The film was preheated to about 320°F (160°C) in about 25
5 seconds and drawn in the transverse direction to a draw ratio of about 6:1 at a rate of about 28% per second. No relaxation was allowed in the stretched direction. The finished film thickness was about 0.0018 inches (0.046 mm).

Figure 7 shows the optical performance of this PEN:sPS reflective polarizer containing 481 layers. Curve a shows transmission of light polarized in the non-
10 stretch direction at normal incidence, curve b shows transmission of p-polarized light at 60° incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. Note the very high transmission of p-polarized light at both normal and 60° incidence. Average transmission for curve a over 400-700 nm is 86.2%, the average transmission for curve b over 400-700 nm
15 is 79.7%. Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700nm) shown by curve c. The film has an average transmission of 1.6% for curve c between 400 and 700 nm. The % RMS color for curve a is 3.2%, while the % RMS color for curve b is 18.2%.

20 EXAMPLE 6 (PEN:coPEN, 603, Polarizer)

A reflecting polarizer comprising 603 layers was made on a sequential flat-film making line via a coextrusion process. A polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (in 60 wt% phenol plus 40 wt% dichlorobenzene) was delivered by an extruder at a rate of 83 pounds (38 kg) per hour and the
25 CoPEN was delivered by another extruder at 75 pounds (34 kg) per hour. The CoPEN was a copolymer of 70 mole %, 2,6 naphthalene dicarboxylate methyl ester, 15 mole % dimethyl terephthalate, and 15 mole % dimethyl isophthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The
layers were deposited sequentially from top to bottom with a thickness ratio of 1:22 from the thinnest layers to the thickest layers. This optical stack was multiplied by two sequential multipliers. The nominal

multiplication ratio of the multipliers was 1.2 and 1.4, respectively. Between the final multiplier and the die, skin layers were added composed of the same CoPEN described above, delivered by a third extruder at a total rate of 106 pounds (48 kg) per hour. The film was subsequently preheated to 300°F (150°C) in about 30
5 seconds and drawn in the transverse direction to a draw ratio of approximately 6 at an initial rate of about 20% per second. The finished film thickness was approximately 0.0035 inch (0.089 mm).

Figure 7B shows the optical performance of the polarizer of Example 6. Curve a shows transmission of light polarized in the non-stretch direction at normal
10 incidence, curve b shows transmission of p-polarized light in the nonstretch direction at 50 degree angle of incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. Note the very high transmission of light polarized in the non-stretch direction. Average transmission for curve a over 400-700 nm is 87%. Also note the very high reflectance of light
15 polarized in the stretched direction in the visible range (400-700nm) shown by curve c. The film has an average transmission of 2.5% for curve c between 400 and 700 nm. The % RMS color for curve b is 5%.

II. Optical Devices Using Multilayer Optical Films

20 Optical devices according to the present invention use multilayer optical films to polarize and/or reflect light. The advantages of using multilayer optical film in optical devices involving reflection of light are graphically illustrated in Figure 8.

Curve a shows the total reflectivity as a function of the number of reflections for convention reflector that has 96% reflectivity (i.e., about 4% of the light is absorbed
25 at each reflection). As shown by curve a, the intensity of light which has been reflected decreases significantly after a relatively low number of reflections when the surface reflecting the light absorbs only about 4% of the light. In contrast, curve b shows the total reflectivity for a multilayer mirror film having a reflectivity

the difference becomes especially pronounced after only 2-4 reflections

For example, for five reflections, the intensity of light is about 97% for light reflected from multilayer optical films according to the present invention, while the intensity drops to about 81.5% for light reflected from a conventional reflector which is only about 3.5% less efficient. Although it is difficult to determine the average number of reflections experienced by light in a backlight system, the number of reflections can be expected to increase as aspect ratio (defined more completely below) increase in any given backlight system. Those increased reflections would cause a significant loss in efficiency for backlight systems using conventional reflectors which would not be experienced in backlight systems employing multilayer optical film reflectors according to the present invention.

The practical value of this characteristic is that the efficiency of the present optical device is greatly enhanced as compared to systems employing conventional reflectors. Stated another way, the number of acceptable reflections for a given light ray in optical devices employing multilayer optical film according to the present invention can be significantly increased without substantially impairing the overall output of the device as compared to optical devices employing known reflectors/polarizers. This means that the present optical devices can be used to transmit and transport light over greater distances with better efficiency than presently known conventional reflectors.

Optical devices which incorporate the multilayer optical film can be most generally described as devices in which at least a portion of the light entering and/or exiting the device is reflected from an optical surface comprising the multilayer optical film. For the purpose of this invention, an "optical surface" will be defined as a surface, planar or otherwise, which reflects at least a portion of randomly polarized light incident upon it. More preferably, at least a portion of the light traveling through the optical devices will be reflected from an optical surface more than once, thereby exploiting the advantages of the multilayer optical film.

A subset of optical devices incorporating multilayer optical film according to the present invention can be categorized into devices in which the optical surfaces are arranged in a parallel or a non-parallel opposing arrangement.

Optical devices with substantially parallel optical surfaces include, but are not limited to: light pipes, light boxes, rectangular light guides, etc. For those devices designed to transmit light from one location to another, such as a light pipe, it is desirable that the optical surfaces absorb and transmit a minimal amount of light incident upon them while reflecting substantially all of the light. In other devices such as light boxes and light guides, it may be desirable to deliver light to a selected area using generally reflective optical surfaces and to then allow for transmission of light out of the device in a known, predetermined manner. In such devices, it may be desirable to provide a portion of the optical surface as partially reflective to allow light to exit the device in a predetermined manner. Examples of such devices will be described more completely below.

Another class of optical devices which include two or more reflective optical surfaces are devices in which the reflective optical surfaces converge towards each other as distance from a light source (or point of entry into the device) increases. This construction is especially useful in optical devices where it is desired to return light emitted from an optical source towards the direction from which the light entered the device. Optical devices with converging reflective optical surfaces will typically reflect a majority of light in a direction generally towards the source of the light.

Yet another class of optical devices which include two or more optical surfaces are devices in which the reflective optical surfaces diverge as distance from a light source (or point of entry into the device) increases. Optical devices with diverging reflective optical surfaces will typically tend to collimate light. The amount and degree of collimation will depend on the location of the light source relative to the narrow end of the device and the rate of divergence of the multilayer reflective optical film surfaces.

In a preferred embodiment, the optical devices are hollow as this will tend to decrease the amount of absorption at each reflection as light is transported by the

device.

In the effort to direct light towards a specific target, such as in task lighting, solar collectors, or otherwise, it may be preferred that the diverging optical surfaces

form a parabola or cone. If a parabolic shape is used, collimation is best accomplished for light passing through or emanating from the focal point of the parabola. The specifics of designing the shape of such devices will be well known to those skilled in the art and will not be discussed herein.

5 Turning now to the figures in which illustrative examples of optical devices according to the present invention are depicted, Figures 9 and 10 depict one illustrative optical device 110 in a cross-sectional schematic view in Figure 9 and a perspective view in Figure 10. Optical device 110 is commonly referred to as a light box and can be substantially rectangular as shown or it can take any other
10 shape desired based on aesthetics or functional considerations. Light boxes are typically substantially enclosed volumes in which one or more light sources are located. The volume is preferably lined with a reflective surface and includes either partially reflective areas or voids which allow light to escape from the light box in a predetermined pattern or manner.

15 The illustrative light box 110 depicted in Figures 9 and 10 includes at least two opposing reflective and/or partially reflective optical surfaces 112 and 114 comprised of the multilayer optical film. It is most preferred that all of the interior reflective surfaces of the light box 110 are covered by the multilayer optical film. By using the multilayer optical film according to the present invention for all of the
20 reflective surfaces within the light box 110, absorption losses can be greatly reduced as compared to devices using conventional reflectors and/or polarizers. In some instances, however, all or a portion of either or both optical surfaces 112 and 114 can be constructed from other materials.

 Where multilayer optical film is used in any optical device, it will be
25 understood that it can be laminated to a support (which itself may be transparent, opaque reflective or any combination thereof) or it can be otherwise supported using any suitable frame or other support structure because in some instances the multilayer optical film itself may not be rigid enough to be self-supporting in an

 The optical device 110 illustrated in Figure 9 includes two light sources 118a and 118b, referred to commonly as 118, which emit light into the interior of

the device 110. Light emitted from the sources 118 will typically reflect between surfaces 112 and 114 numerous times before exiting the device 110 through a partially reflective area or transmissive void located in surface 112, denoted by reference number 130 in Figure 10.

5 For illustration purposes, light rays 120 and 122 are shown as emanating from source 118a and reflecting within the optical device 110 until they exit from areas such as 130 in layer 112. In an illuminated sign depicted as the illustrative optical device 110, areas 130 will typically comprise advertising or other informational messages or, alternatively, may comprise a decorative display of some
10 type. Although only areas 130 are depicted as transmitting light through optical surface 112, it will be understood that all or any portion of both surfaces 112 and 114 may transmit light out of device 110.

Areas 130 which transmit light can be provided of many different materials or constructions. The areas 130 can be made of multilayer optical film or any other
15 transmissive or partially transmissive materials. One way to allow for light transmission through areas 130 is to provide areas in optical surface 112 which are partially reflective and partially transmissive. Partial reflectivity can be imparted to multilayer optical films in areas 130 according to the present invention by a variety of means.

20 In one aspect, areas 130 may comprise multi-layered optical film which is uniaxially stretched to allow transmission of light having one plane of polarization while reflecting light having a plane of polarization orthogonal to the transmitted light. Rays 120a and 120b of light as depicted in Figure 9 illustrate such a situation in which light having one polarization direction is transmitted through multi-layered
25 optical film 130 while light having the orthogonal polarization direction is reflected back into optical device 110.

When areas 130 are provided from a multilayer reflective polarizing film, it is preferable that the optical device 110 include some mechanism for randomizing

One mechanism for randomizing polarization orientation would be to provide a thin pigmented coating on optical surface 114 to randomize polarization and

scatter light reflected from the areas 130. Another mechanism is to add a birefringent polymer film, or to have a birefringent skin layer on the MOF mirror. Any mechanism, however, by which the polarization orientation of returned light 120b can be modified after reflection from the reflective polarizing areas 130 is desirable as it can then be returned to areas 130 and, theoretically, a portion of the light will then have the proper polarization orientation to allow transmission through areas 130 and out of optical device 110.

Light ray 122 depicts the effect of an alternate means of providing for transmission of light through areas 130 in an optical device 110 according to the present invention. Light ray 122 is transmitted through areas 130 without reflection through a void formed in the optical surface 112. As a result, there is no partial reflection of light ray 122 as opposed to light ray 120 as described above. In this situation, optical surface 112 is itself substantially completely reflective, except for those voids in areas 130 which transmit light without substantial reflection.

It will be understood that the term "void" can be used to describe an actual physical aperture through optical surface 112 as well as clear or transparent areas formed in the optical surface 112 which do not substantially reflect light. The number and size of multiple apertures in area 130 of optical surface 112 may be varied to control the amount of light transmitted through the areas 130. At one extreme, areas 130 may even constitute complete voids in optical surface 112, although large voids are typically undesirable to protect the interior of the device 110 from debris, dust, etc.

An alternate embodiment of an optical device 110 can be provided where at least the areas 130 in optical surface 112 do not comprise a multilayer optical film at all, but rather comprise a different class of partially reflective films, such as a structured partially reflective film. Exemplary micro-replicated structured partially reflective films are marketed as Optical Lighting Film, and Brightness Enhancement Film, available from Minnesota Mining and Manufacturing Company, St. Paul.

in those instances where a less efficient multilayer optical film is used (i.e., some of the light incident upon the multilayer optical film surfaces is lost through

transmission), it may be advantageous to provide the back surfaces of the multilayer optical film, i.e., the surface facing the exterior of the device 110, with a thin metal or other reflective coating to reflect light that would otherwise be lost to transmission, thereby improving the reflectivity of the multilayer optical film. It will
5 of course, be understood that the metallic or other reflective coating may suffer from some absorption losses, but the fraction of light transmitted through the film will typically be less than 5% (more preferably less than 1%) of the total light incident on the film. The metallic or other reflective coating may also be useful to
10 multilayer optical film. In general, however, the high efficiency multilayer reflective films are preferred.

Due to the high efficiency of the multilayer optical film in reflecting light in optical devices 110, the number and intensity of light sources 118 needed to provide uniform illumination over the areas 130 can be reduced. Any optical device design
15 can be less concerned about the number of reflections a light ray will make within device 110 before exiting as illustrated in Figure 10 and described above.

Aspect ratio in a device 110 is typically determined by comparing the depth of the light box, indicated as D in Figure 10 to the length and height of the device 110, indicated as L and H, respectively. In some instances, aspect ratio may be the
20 ratio of depth D as compared to the area which is defined by the length times the height of optical device 110.

Figure 11 is a schematic cross-sectional representation of a converging wedge optical device 210, according to the present invention, incorporating multilayer optical film. In any optical device employing a converging wedge design,
25 the optical surfaces 212 and 214 are arranged in a converging relationship in which the optical surfaces converge towards each other as distance from the opening 211 into the device 210 increases. In the preferred embodiment, the surfaces 212 and 214 are comprised of a multilayer optical film. Also, the optical device 210 is

FIGURE 11

30 It will be understood that the optical device 210 could comprise two generally planar optical surfaces 212 and 214. One specific example of a

converging wedge design would be a light guide used in a backlight assembly for a liquid crystal display device. Another specific example of an optical device represented in Figure 11 could comprise a generally conical device having a cross-section taken along the longitudinal axis of the device 210. In a conical device, optical surfaces 212 and 214 may actually be portions of a continuous surface which appears discontinuous due to the cross-sectional nature of the view in Figure 11.

A light ray 220 is depicted as entering the optical device 210 through opening 211 as shown and is reflected numerous times before exiting in generally the same direction from which it entered the device 210. Optical surfaces 212 and 214 could be comprised of many different materials. For example both surfaces 212 and 214 could be comprised of multilayer optical films according to the present invention and a portion or all of either or both surfaces 212 and 214 could be completely reflective or partially reflective.

If a less efficient multilayer optical film is used for reflective optical surfaces 212 and 214 and it is desired that both surfaces prevent transmission of light, they can be coated on their "exterior" surfaces with a reflective coating such as a thin metallic layer or other reflective coating. That additional layer will help to ensure that layers 212 and 214 do not transmit light. In some instances, however, it may be desirable to provide one or both of the multi-layered optical films 212 and 214 as partially reflective to allow some leakage of light, polarized or not, through surfaces 212 and/or 214 in a uniform or other controlled manner. One specific example of a device 210 where uniform distribution of light is desired is a light guide backlight assembly for a liquid crystal display.

Figure 12 is a schematic cross-sectional representation of a diverging wedge optical device 310 according to the present invention. In any optical device employing a diverging wedge design, the optical surfaces 312 and 314 are arranged in a diverging relationship in which the surfaces diverge as distance from the light source. The optical surfaces 312 and 314 are preferably comprised of a multilayer optical film. Also, the optical device 310 is preferably hollow to minimize absorption losses. It will be understood that, like the

converging wedge device 210, the diverging wedge depicted in Figure 12 could comprise two generally planar optical surfaces 312 and 314 or that device 310 could comprise a generally conical, parabolic or other shape in which the depicted cross-section is taken along the longitudinal axis of device 310. In such an optical device, optical surfaces 312 and 314 may actually be portions of a continuous surface which appears discontinuous due to the cross-sectional nature of the view in Figure 11.

An optical device which includes diverging optical surfaces will tend to collimate light exiting it as light rays 320 and 322 illustrate. The device 310 depicted in Figure 12 includes a light source 318 located at the entry into device 310. It will, however, be understood that a diverging optical device may include a plurality of sources 318. If device 310 were formed in a roughly parabolic shape, that collimation would be more pronounced if the light source 318 was located proximate the focal point of the parabola. Alternatively, a diverging optical device 310 could also rely on a light generated from a source or sources located away from the actual opening into the diverging optical device 310.

In general, the degree and amount of collimation of light exiting such a device 310 is dependent on a number of factors including the angle of light rays entering the device, the location of the light source, and the shape and/or angular relationship between the optical surfaces 312 and 314.

Figure 13 is a cross-sectional schematic view of another illustrative optical device 410 formed using the multilayer optical film according to the present invention. The cross-section of device 410 as depicted in Figure 13 is taken along a longitudinal axis which shows two generally parallel optical surfaces 412 and 414. An additional view is depicted in Figure 14, which shows a cross-section of device 410 taken transverse to the longitudinal axis. As depicted, device 410 has a generally circular shape.

Optical devices such as device 410 are typically used to transmit light and have a longitudinal axis and a cross-section transverse to that axis which forms a closed plane figure. Examples of some typical cross-section figures include circles

(such as that shown in Figure 14), ellipses, polygons, closed irregular curves, triangles, squares, rectangles or other polygonal shapes. Any device 410 having a closed plane figure transverse cross-section appears as two surfaces in a longitudinal cross-section as shown in Figure 13 even though the device 410 may
5 actually be formed from a single continuous optical surface.

Because the multilayer optical film according to the present invention used absorbs substantially none of the light incident upon it, light pipes constructed of multilayer optical film according to the present invention can extend for a relatively large distances without significant loss of throughput.

10 It is particularly advantageous to use the multilayer optical film with devices such as light pipes in which a large portion of the light travelling through the device approaches the surfaces of the device at shallow angles. Known multilayered polymer reflective films are not efficient at reflecting light approaching them at shallow angles and, therefore, would suffer from large transmissive losses. The
15 present multilayer optical film, however, is able to reflect such light with the much the same efficiency as light approaching the film normal to the surfaces.

Alternately, it will be understood that a device such as light pipe 410 may include sections which are partially transmissive, thus allowing light to escape from the device. The transmission mechanisms may include multilayer reflective
20 polarizing sections, voids or any other mechanism as described with respect to the illustrative embodiments above. Such designs do, however, start to resemble light boxes or guides depicted and described in conjunction with Figures 9 and 10, above.

Figure 15 illustrates another optical device according to the present
25 invention. The optical device 505 depicted in Figure 15 could be used, for example, in a decorative application such as a flower or a bow. Device 505 is constructed of a plurality of multilayer optical film layers (such as layers 510 and 520) connected generally in their centers by a post or some other mechanism. Although the layers

represented in general in Figure 15 could be provided in a variety of shapes, other shapes could be provided.

The layers can be wrinkled or otherwise manipulated to give the device 505 volume. The wrinkling of multilayer optical film layers also provides device 510 with multiple converging wedges arranged generally vertically to return light incident on the device 505 to a viewer.

5 Although not required, leakage or transmission of light through the layers of multilayer optical film in device 505 is not a great concern as transmitted light can be reflected out of the device 505 by the adjacent diverging wedge formed by the next layer of film. Because of the adjacent diverging wedges in device 505, it makes highly efficient use of leakage between the vertically arranged converging
10 wedges because light escaping one wedge could be reflected back out of the adjacent wedge into which the light is transmitted. As a result, device 505 has an unusually brilliant appearance.

The multilayer optical film may also be provided in the form of elongated strips. Such strips of film can be advantageously used to form other configurations
15 of optical devices which can be used, for example, as decorative bows, such as any of those described in U.S. Patent Numbers 3,637,455 (Pearson et al.); 4,329,382 (Truskolaski et al.); 4,476,168 (Aoyama); and 4,515,837 (Chong); and in U.S. Patent Application Serial Numbers 08/031,560 (Huss) and 08/153,373 (Huss).

Optical device 505 illustrates another significant advantage of the optical
20 devices incorporating multilayer optical film according to the present invention, i.e., that the devices need not exhibit symmetry to be effective. In fact, optical devices according to the present invention need not exhibit symmetry in any plane or about any line but can still function effectively and efficiently due to the low absorbance and high reflectance both at normal angles and at high angles away from the normal
25 of the multilayer optical films.

Symmetry in optical devices is provided in many instances to reduce or minimize the number of reflections experienced by light travelling through the devices. Minimizing reflections is particularly important when using conventional
30 (see, for example, the accompanying description above). Because optical devices using multilayer optical film according to the present invention experience significantly reduced absorption,

it is much less important to minimize the number of reflections and, consequently, symmetry is not as important to maintain the efficiency of the optical devices.

As a result, although the illustrative optical devices described above do generally exhibit symmetry about at least one axis, the present invention should not
5 be limited to optical devices having an axis of symmetry. Furthermore, the present invention has been described above with respect to illustrative examples to which modifications may be made without departing from the scope of the invention as defined by the appended claims.

Claims

1. An optical device comprising reflecting means for at least partially reflecting light, the reflecting means comprising at least one optical surface comprising a multilayer optical film comprising:
 - (a) a first layer comprising an oriented birefringent polymer, the first layer having an average thickness of not more than about 0.5 microns; and
 - (b) a second layer of a selected polymer, each second layer having an average thickness of not more than 0.5 microns.
2. A device according to claim 1, wherein the first layer comprises a crystalline naphthalene dicarboxylic acid polyester.
3. A device according to claim 1, wherein the oriented birefringent first layer is more birefringent than the second polymer.
4. A device according to claim 1, further comprising a plurality of first and second layers, wherein one of the second layers is located between each adjacent pair of first layers.
5. A device according to claim 4, wherein the first and second layers are adhered to each other.
6. A device according to claim 1, wherein the film comprises at least fifty of each of the first and second layers.
7. A device according to claim 1, wherein the film has been stretched along a first in-plane axis

8. A device according to claim 7, wherein the film has a second dimension along a second in-plane axis generally orthogonal to the first in-plane axis, and further wherein the amount of stretch along the first in-plane axis is at least twice the second dimension.
9. A device according to claim 8, wherein the first layers of an oriented birefringent polymer have a higher index of refraction associated with at least one in-plane axis than the index of refraction of the second layers of said second polymer.
10. A device according to claim 9, wherein said higher index of refraction is at least 0.05 higher.
11. A device according to claim 9, wherein said higher index of refraction is at least 0.10 higher.
12. A device according to claim 9, wherein said higher index of refraction is at least 0.20 higher.
13. A device according to claim 1, wherein the film has been stretched in at least two in-plane directions.
14. A device according to claim 2, wherein the naphthalene dicarboxylic acid polyester is a poly(ethylene naphthalate).
15. A device according to claim 2, wherein the naphthalene dicarboxylic acid polyester is a copolyester comprising naphthalate units and terephthalate units.

polyester

17. A device according to claim 16, wherein said second polymer comprises naphthalene units.
18. A device according to claim 16, wherein said second polymer is a copolyester comprising naphthalate units and terephthalate units.
19. A device according to claim 2, wherein said second polymer is a polystyrene.
20. A device according to claim 2, wherein said second polymer is a fluoropolymer.
21. A device according to claim 2, wherein said second polymer is a polyacrylate, polymethacrylate, polymethylmethacrylate, or polyolefin.
22. A device according to claim 2, wherein said film has an average reflectivity, for at least one plane of polarization, of at least 50% over at least a 100 nm wide band.
23. An optical device comprising a body having a cross-section which defines at least two opposing optical surfaces, at least a portion of at least one of the optical surfaces comprising a multilayer optical film, the film comprising:
- (a) a first layer comprising an oriented birefringent, the first layer having an average thickness of not more than about 0.5 microns; and
 - (b) a second layer of a selected polymer, each second layer having an average thickness of not more than 0.5 microns.
24. A device according to claim 23 wherein the first layer comprises a ~~same naphthalene terephthalate copolyester~~
25. An optical device according to claim 23, wherein substantially all of the optical surfaces comprise the multilayer optical film.

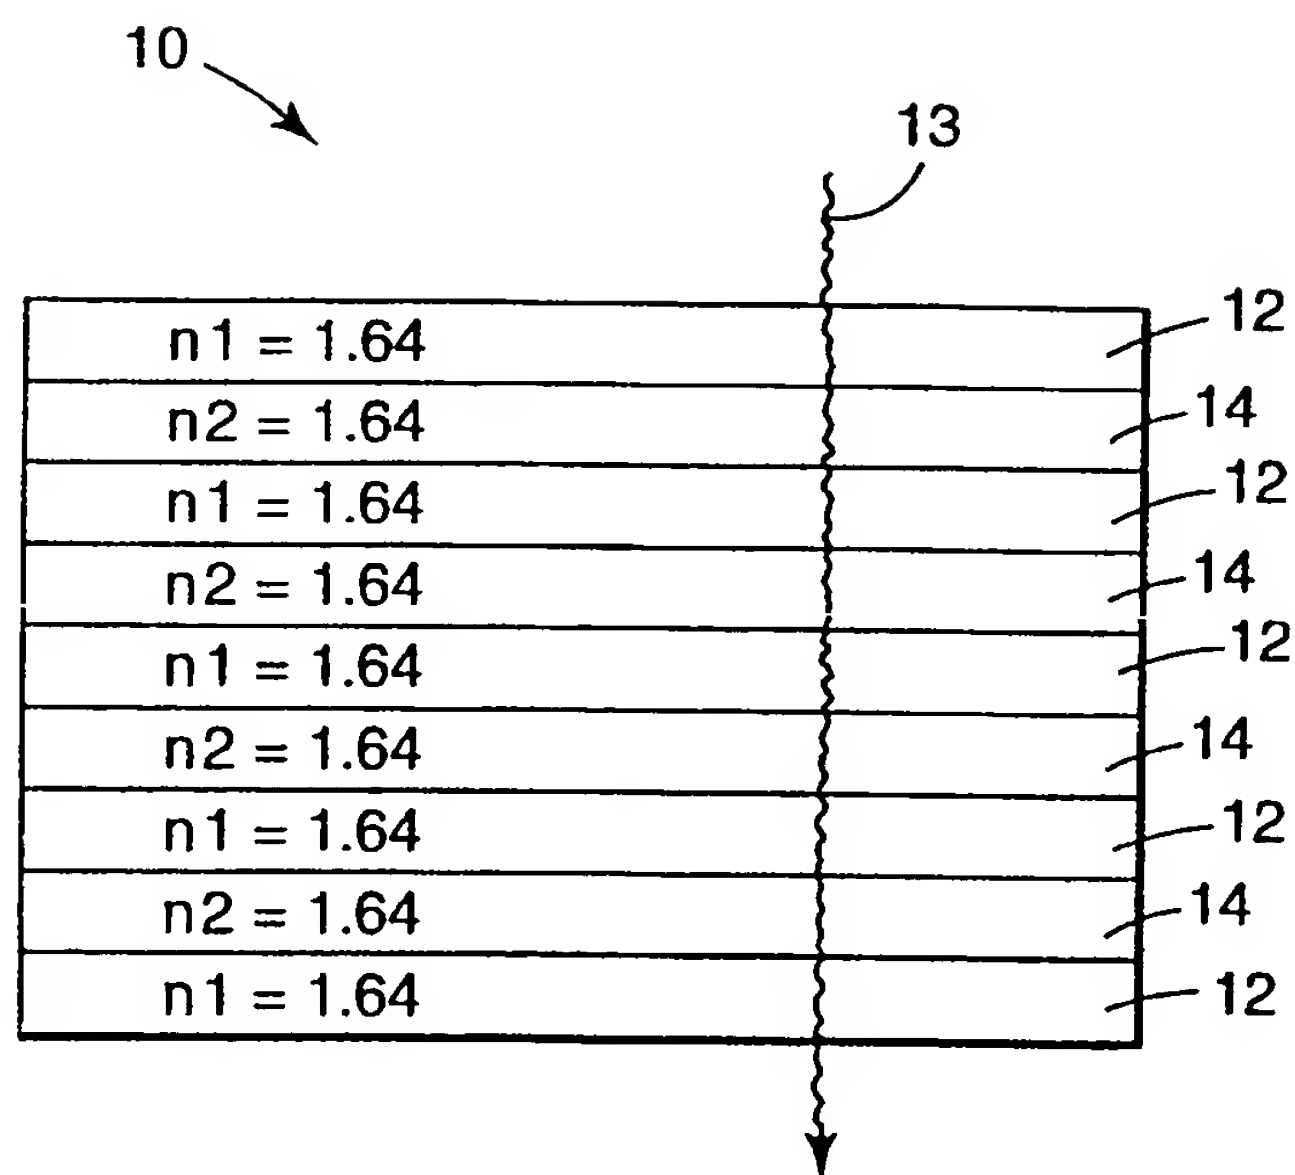
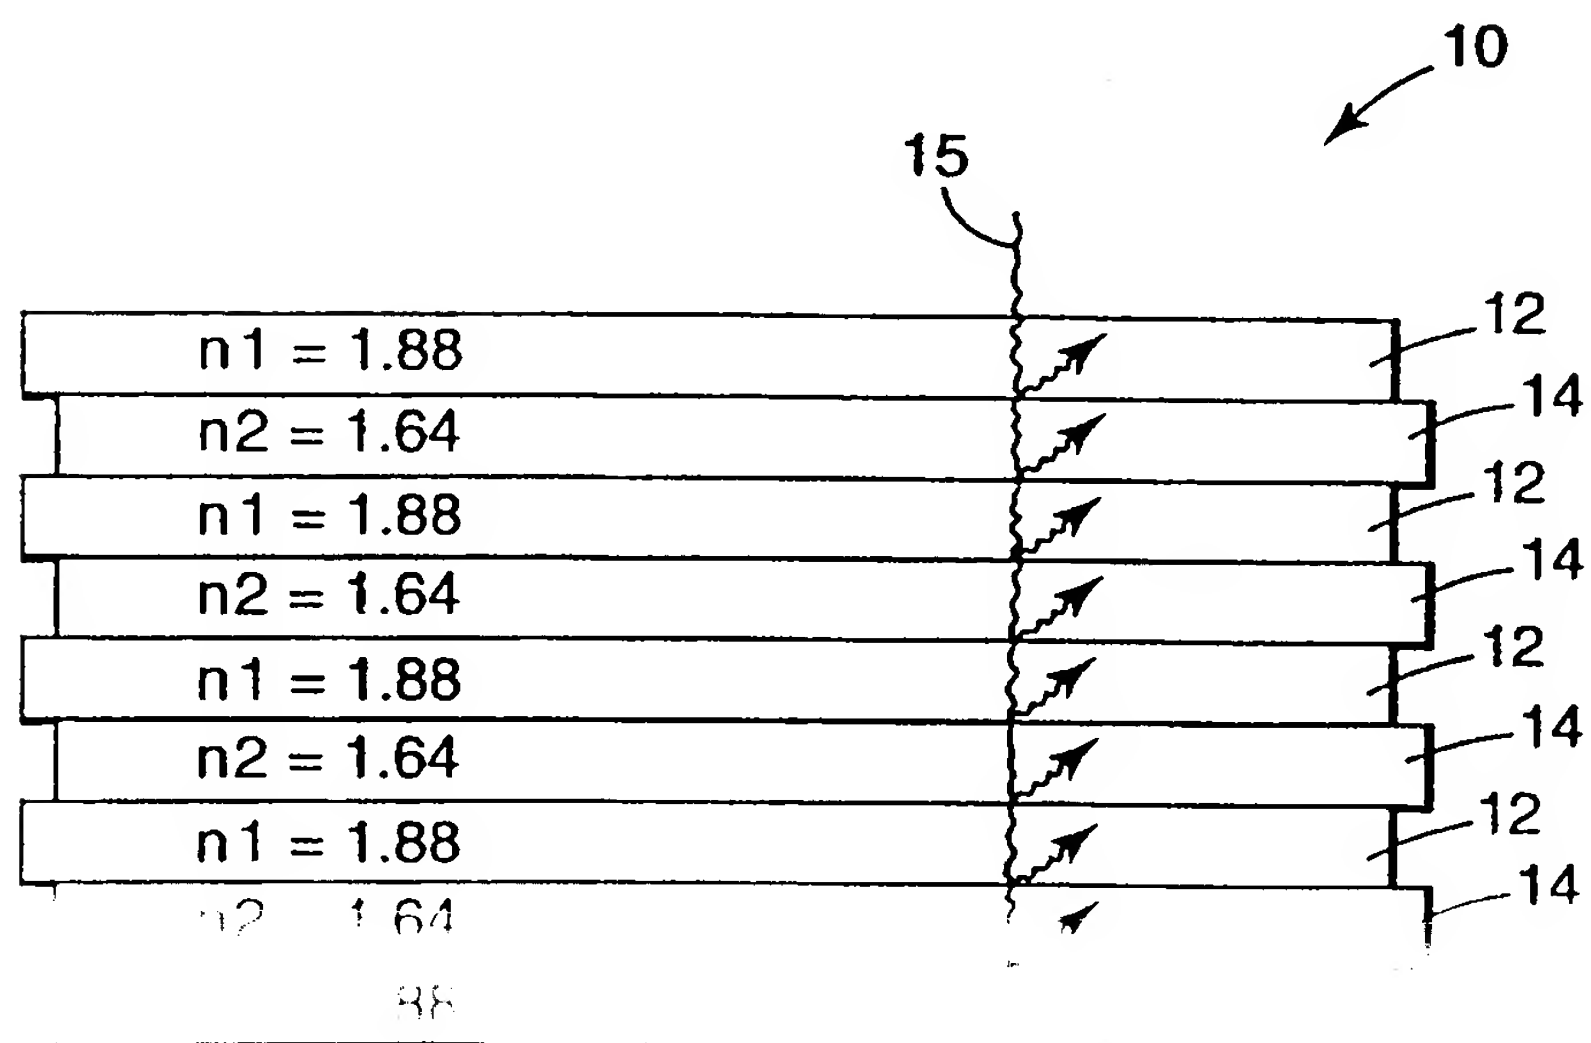
26. An optical device according to claim 23, wherein the multilayer optical film is partially reflective.
27. An optical device according to claim 26, wherein the partially reflective multilayer optical film comprises a reflective polarizer.
28. An optical device according to claim 26, wherein the partially reflective multilayer optical film comprises at least one void formed in the multilayer optical film.
29. An optical device according to claim 23, wherein the first and second optical surfaces lie substantially in planes which are arranged substantially parallel to each other.
30. An optical device according to claim 23, wherein the body comprises a diverging wedge optical device.
31. An optical device according to claim 23, wherein the body comprises a converging wedge optical device.
32. An optical device according to claim 23, wherein the body comprises a light pipe.
33. An optical device according to claim 23, wherein the body defines a substantially enclosed volume and further wherein the optical device comprises at least one light source located within the volume.
34. An optical device according to claim 33, wherein substantially all of the

35. An optical device comprising a body having a cross-section which defines at least two opposing optical surfaces, at least a portion of each of the optical surfaces comprising a multilayer optical film, the film comprising.

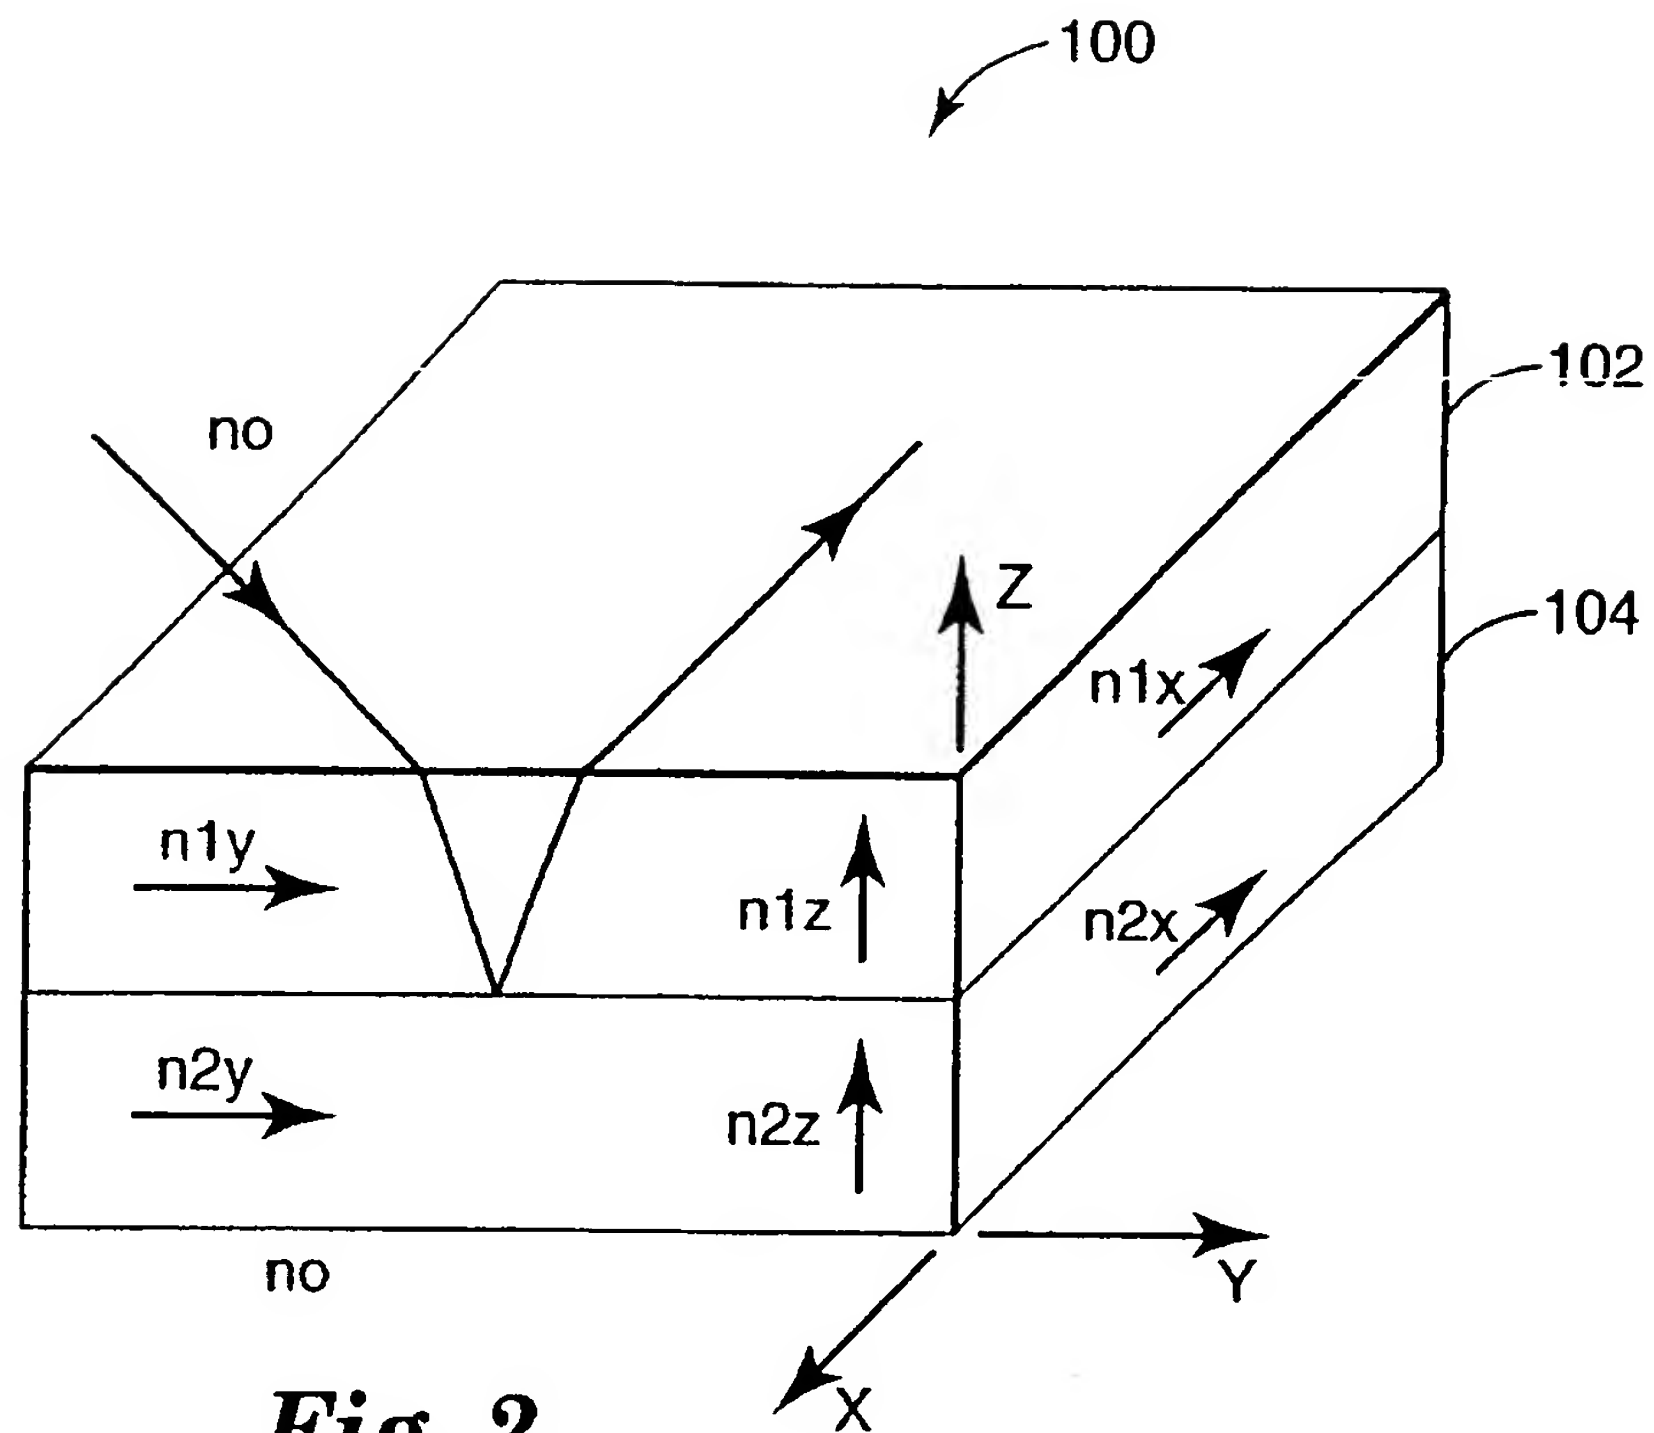
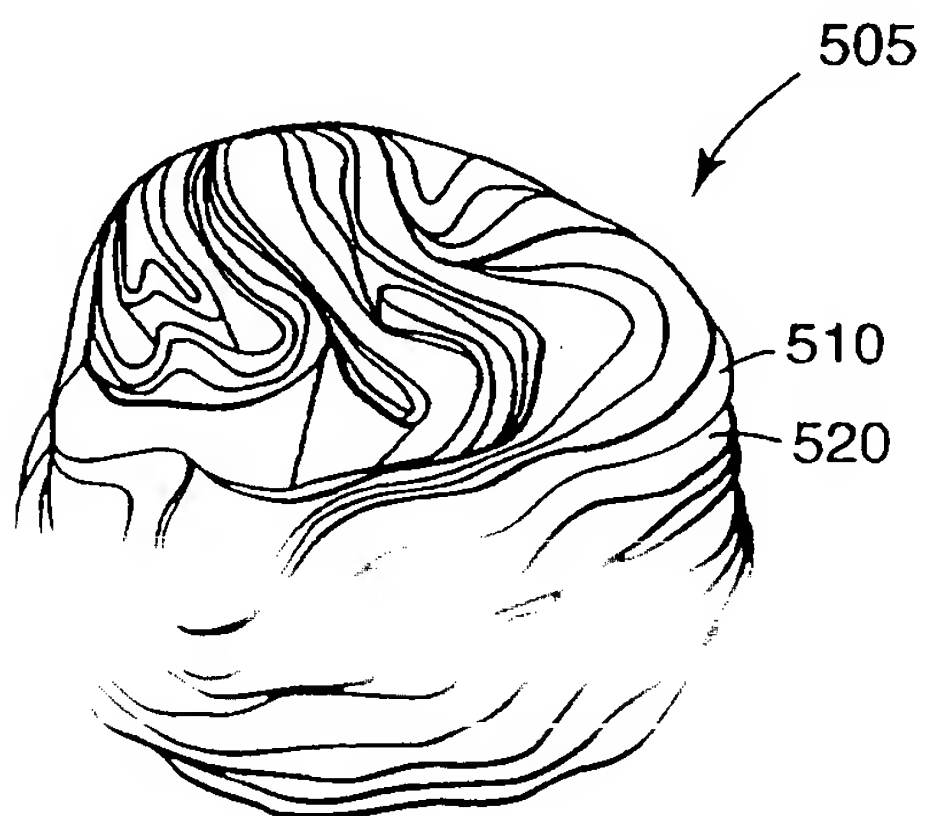
(a) a plurality of first layers each comprising a crystalline naphthalene dicarboxylic acid polyester having a positive stress optical coefficient, each of the plurality of first layers having an average thickness of not more than about 0.5 microns; and

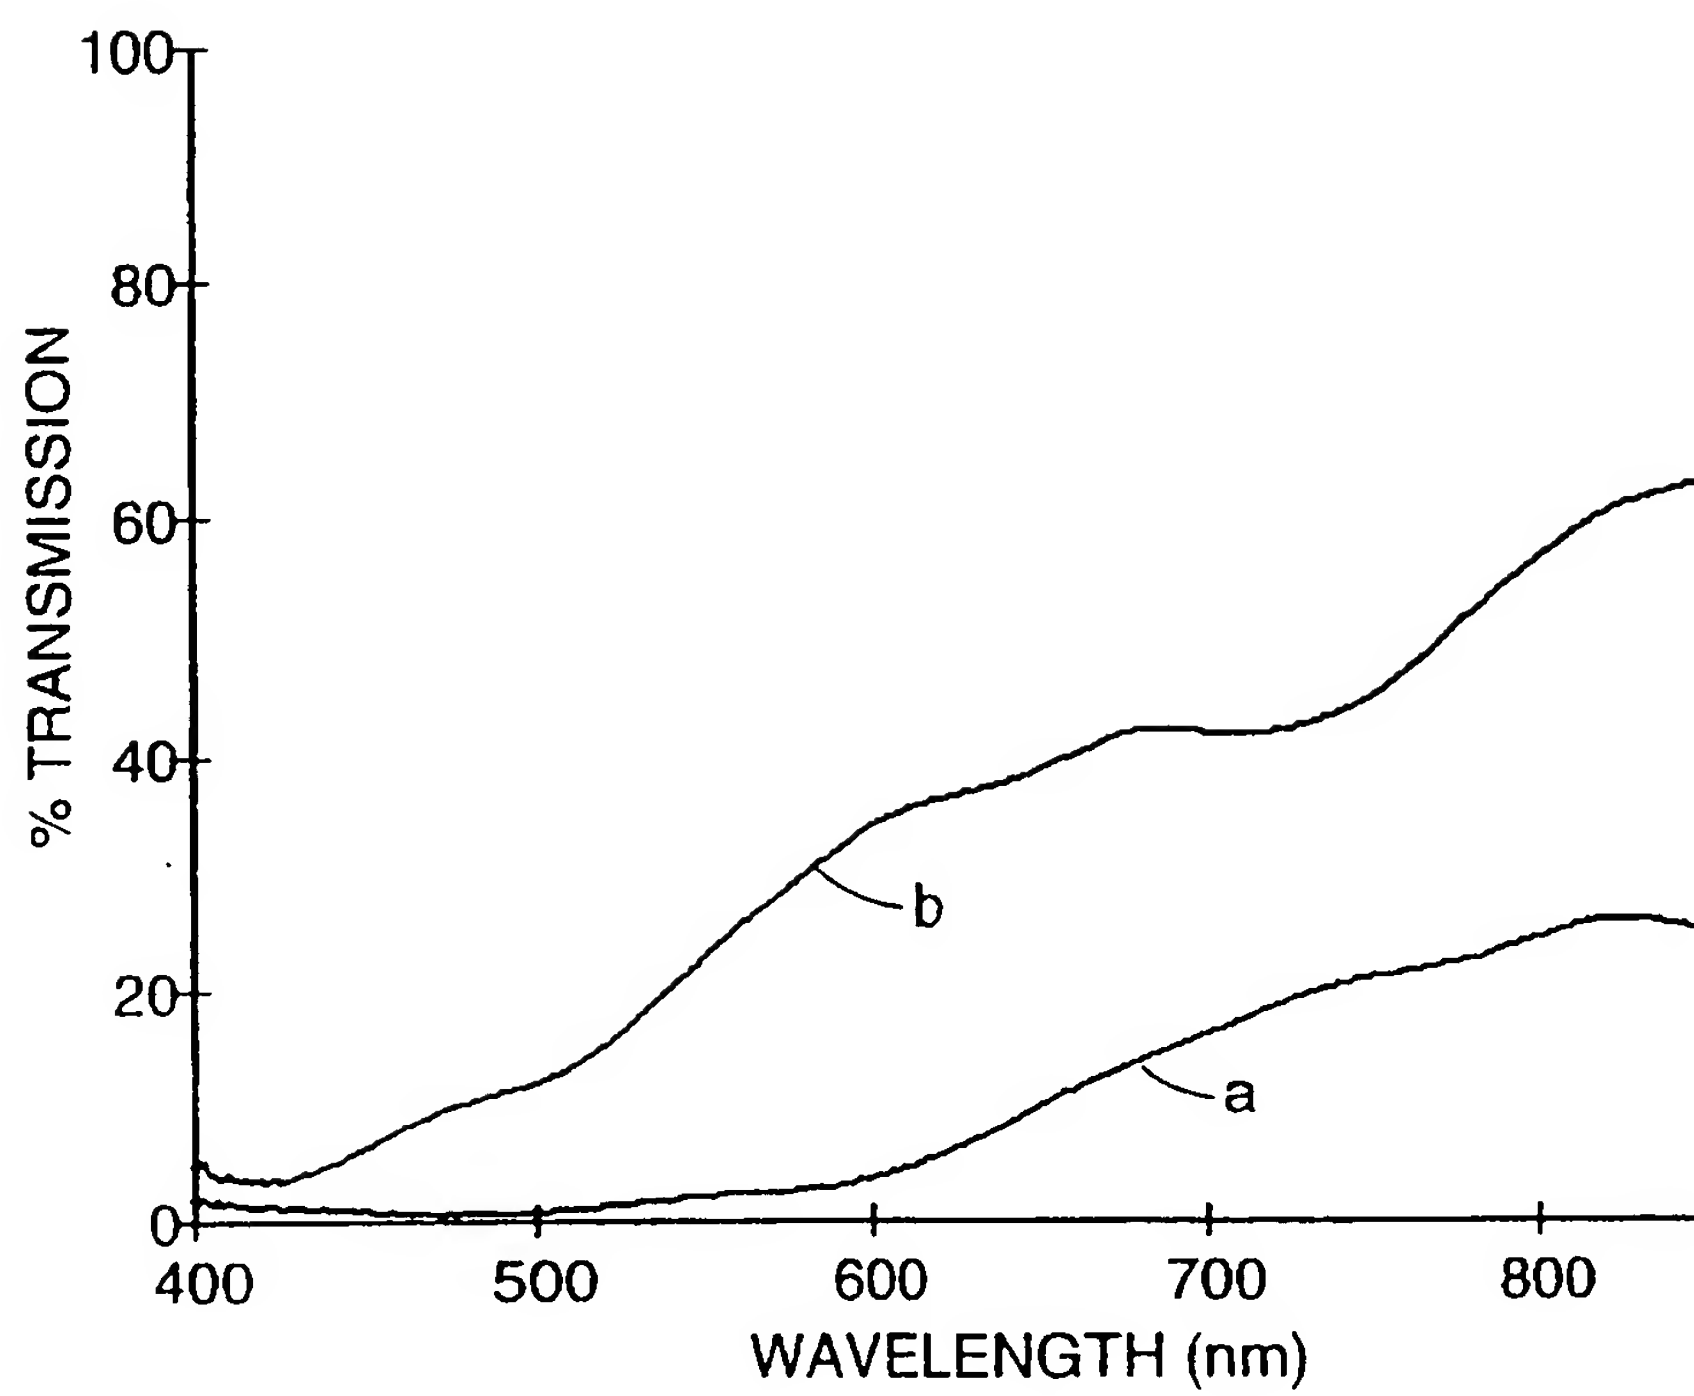
(b) a second layer of a selected second polymer located between adjacent pairs of the first layers, each second layer having an average thickness of not more than 0.5 microns, wherein the naphthalene dicarboxylic acid polyester in the first layers is more positively birefringent than the second polymer in the second layers.

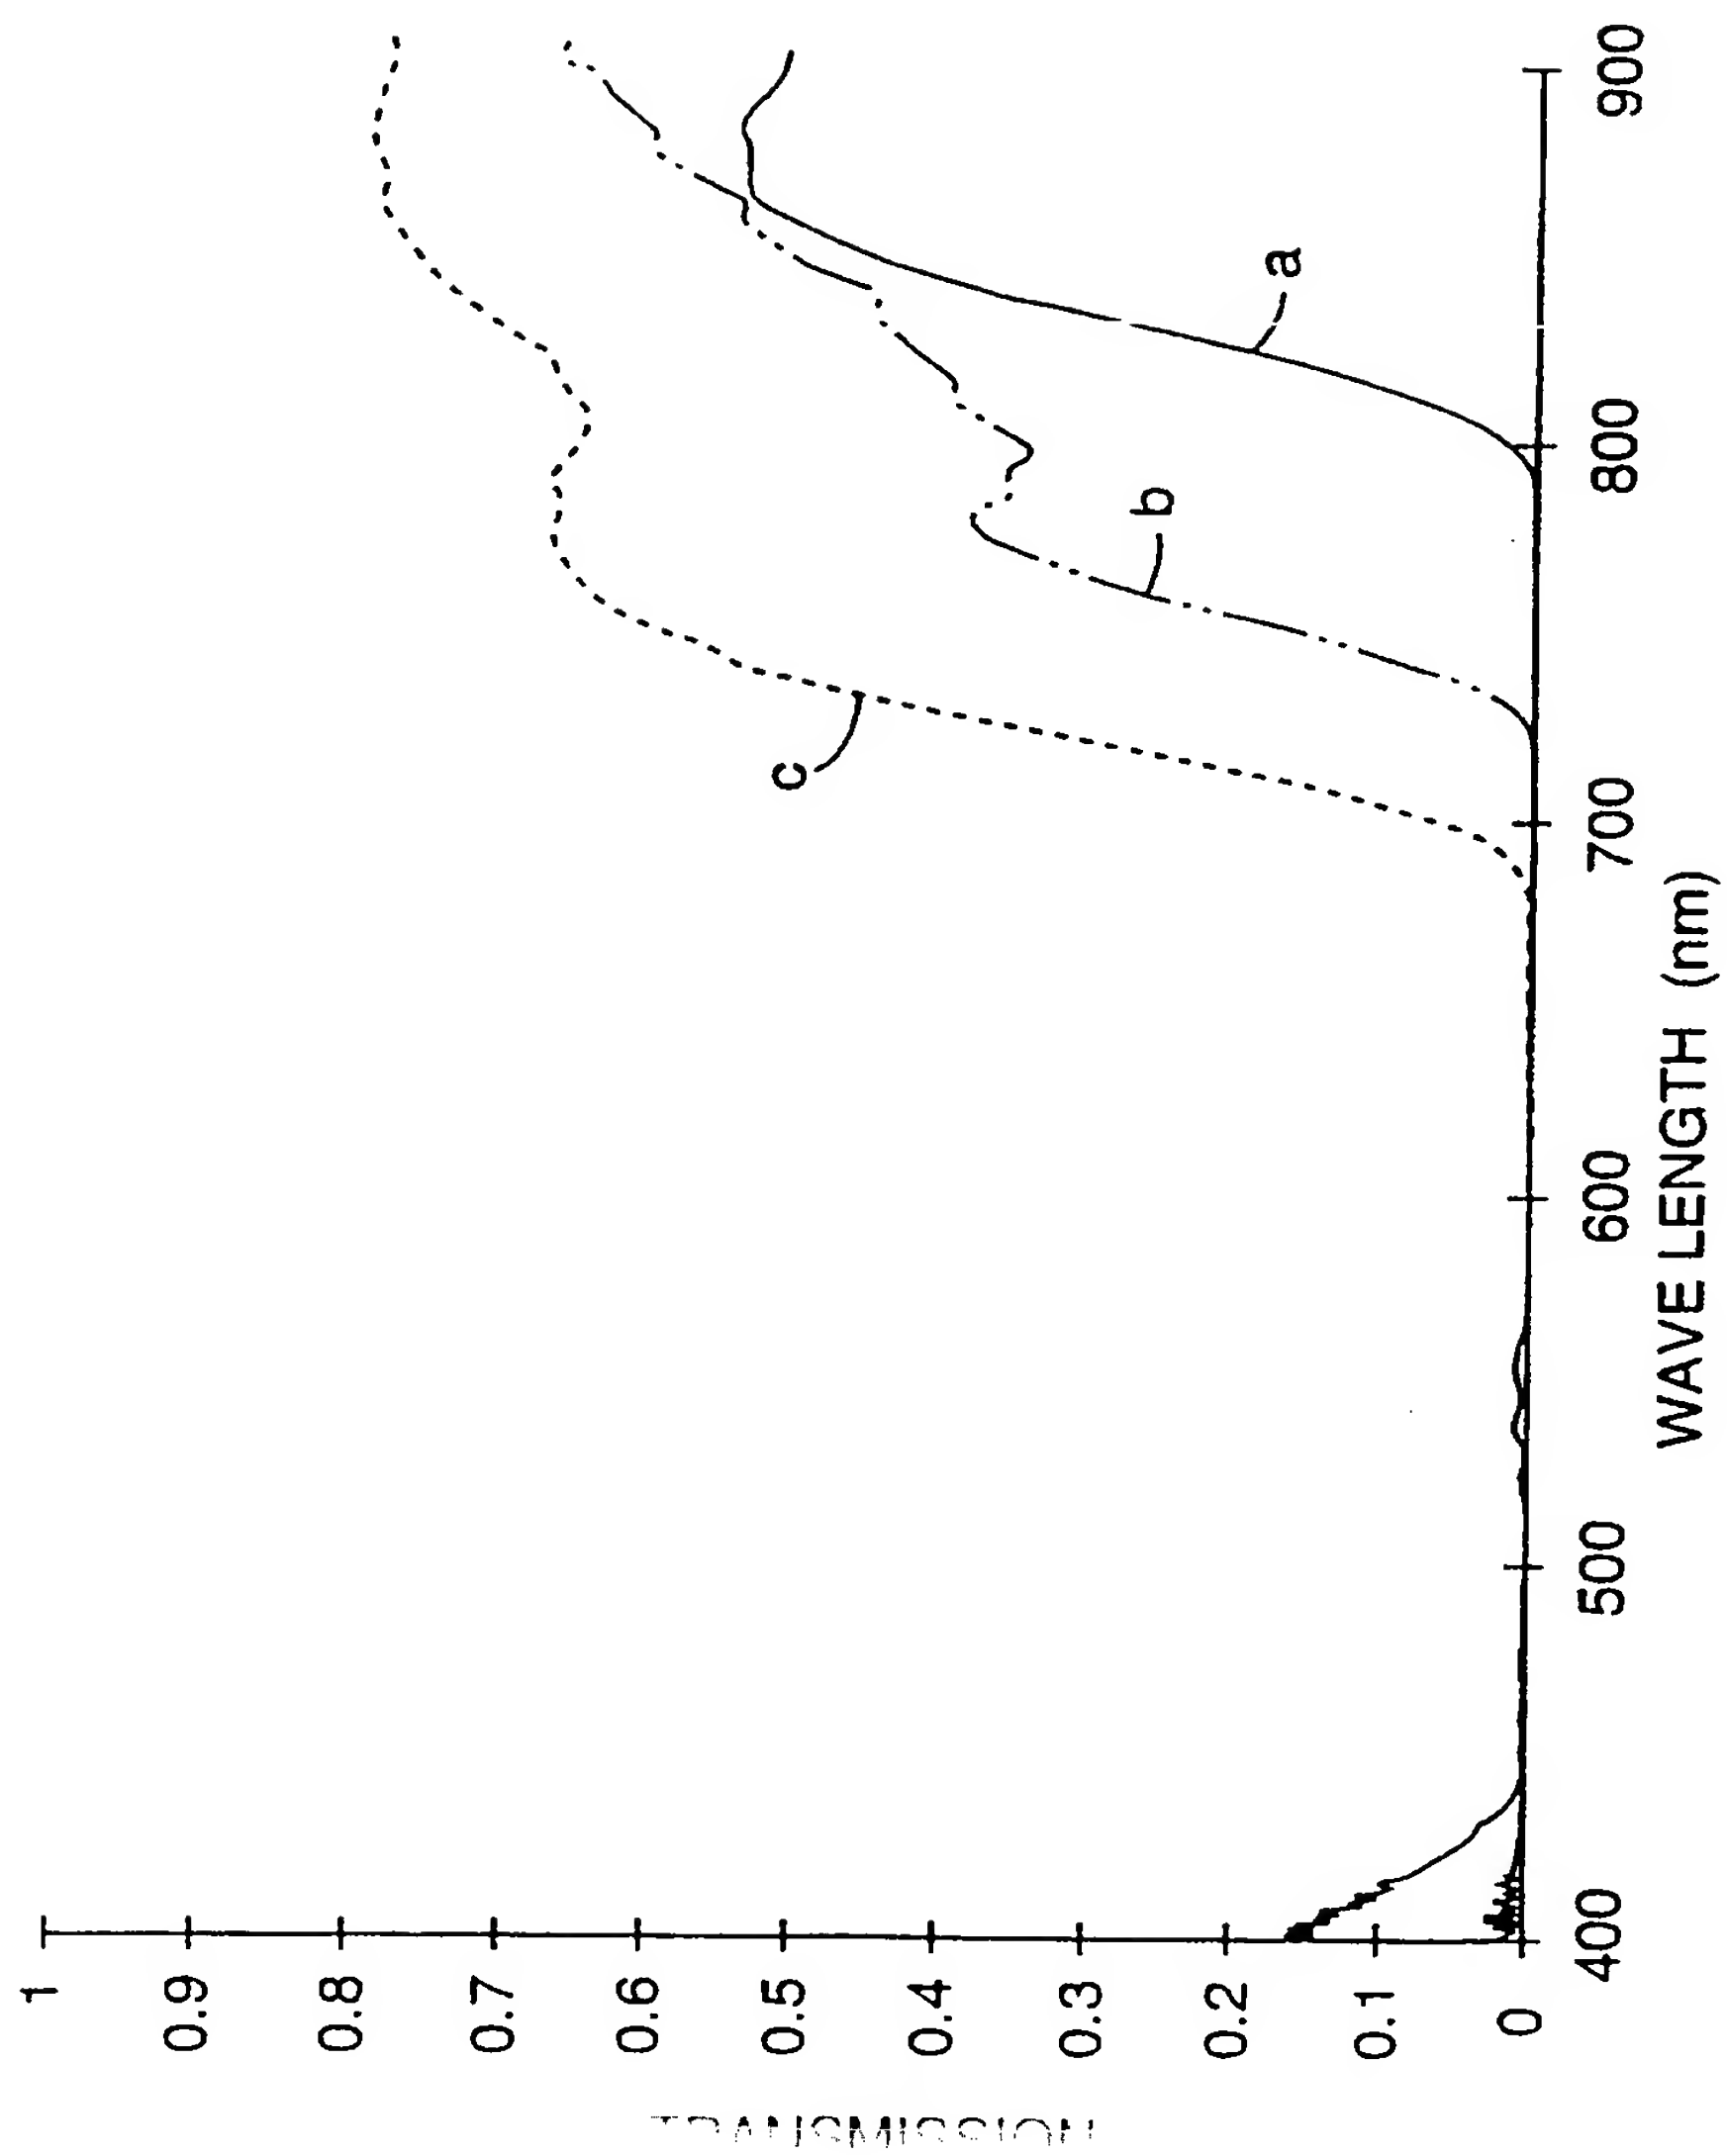
1/10

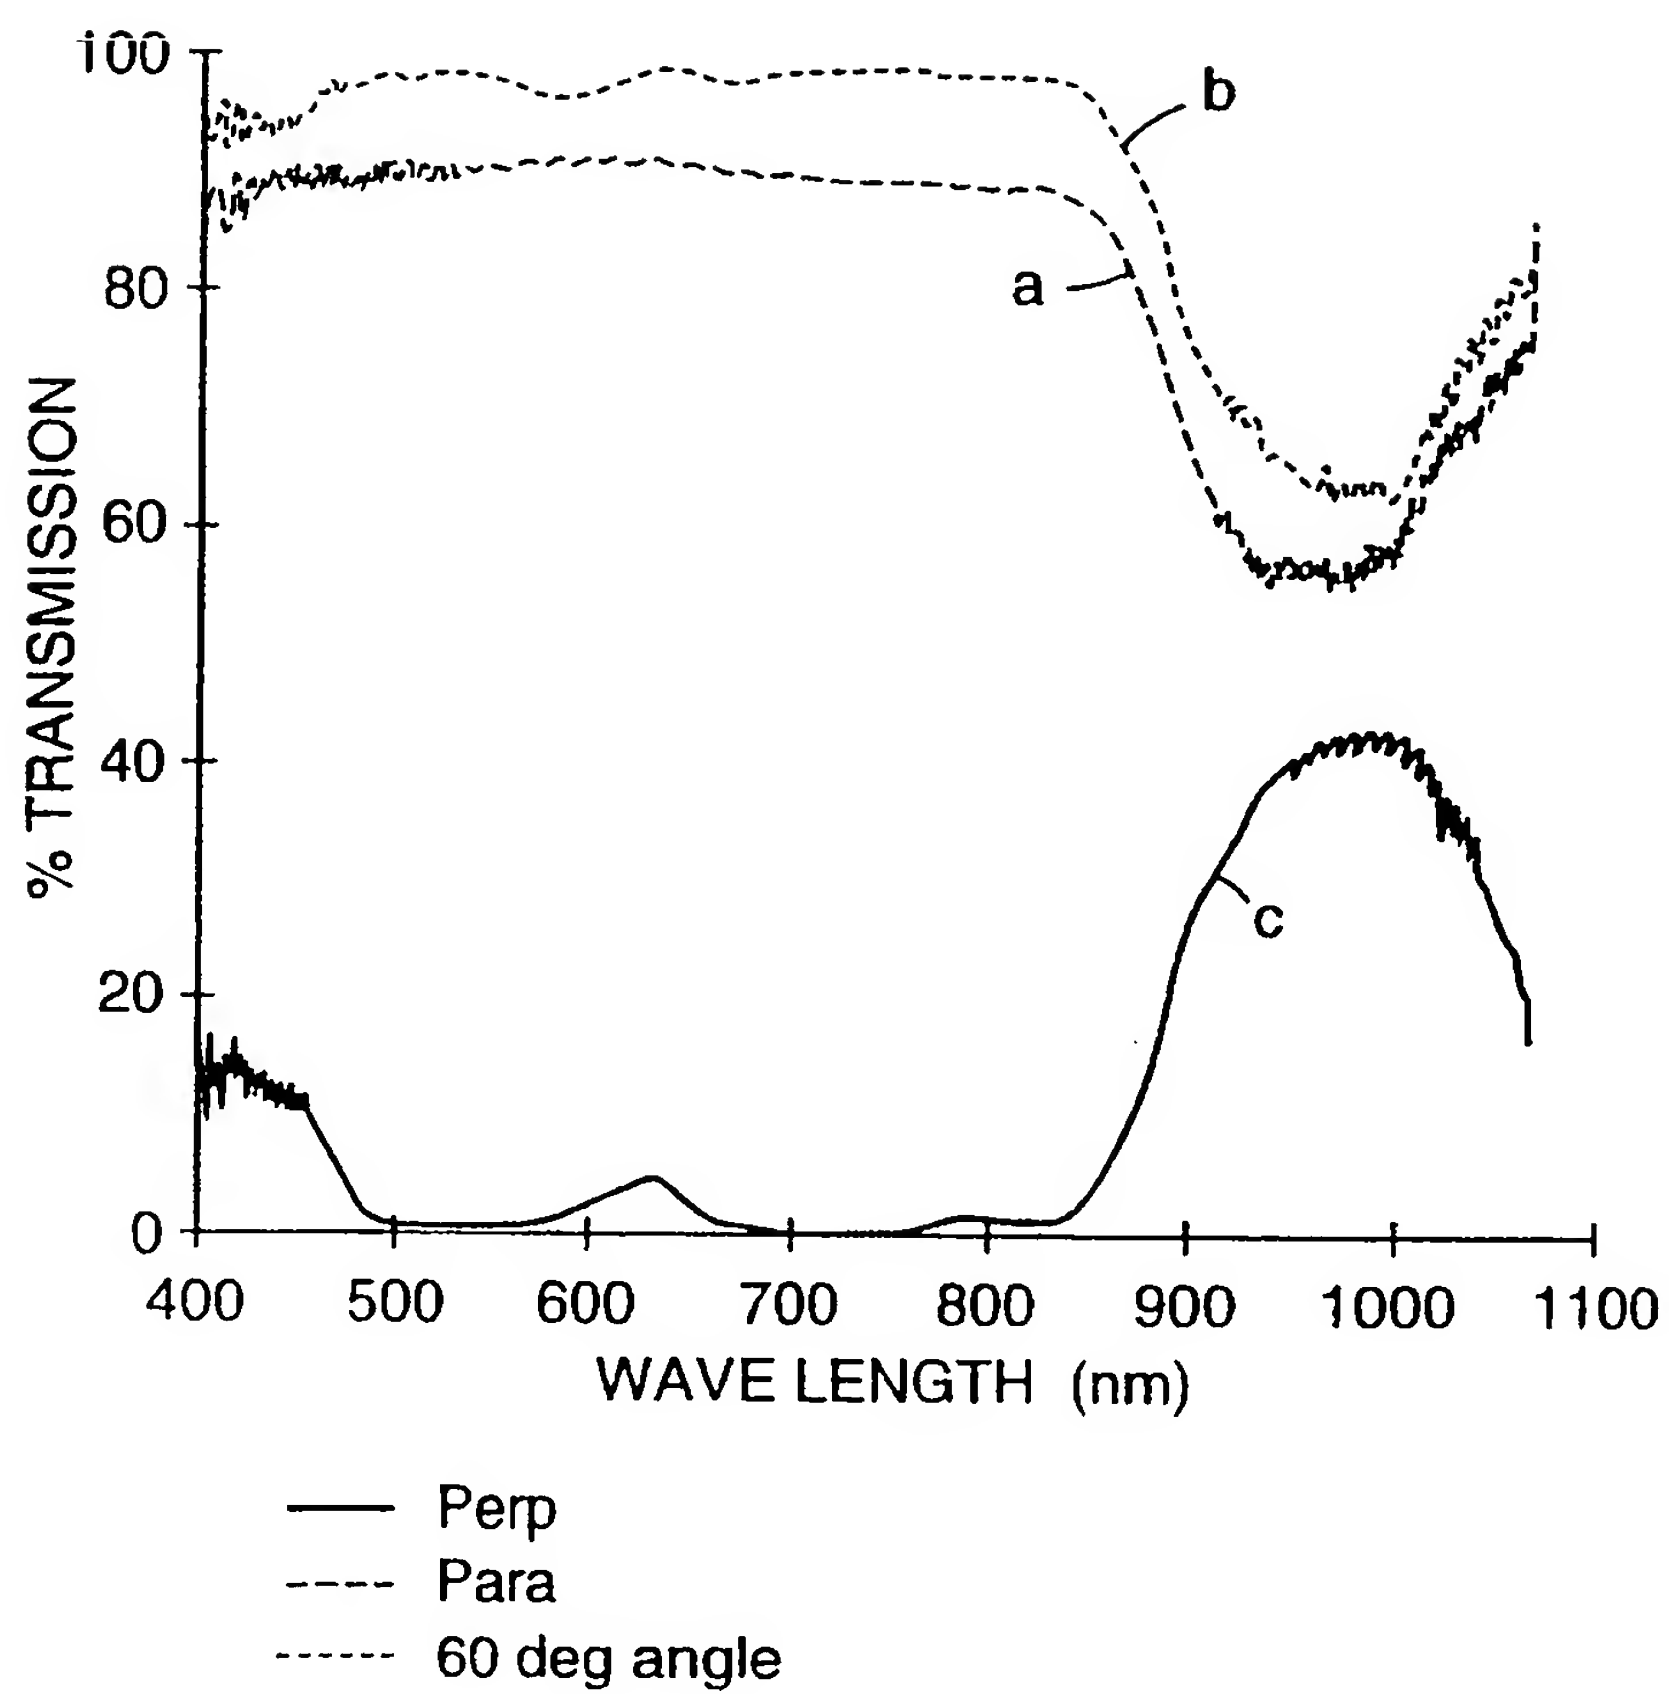
*Fig. 1a**Fig. 1b*

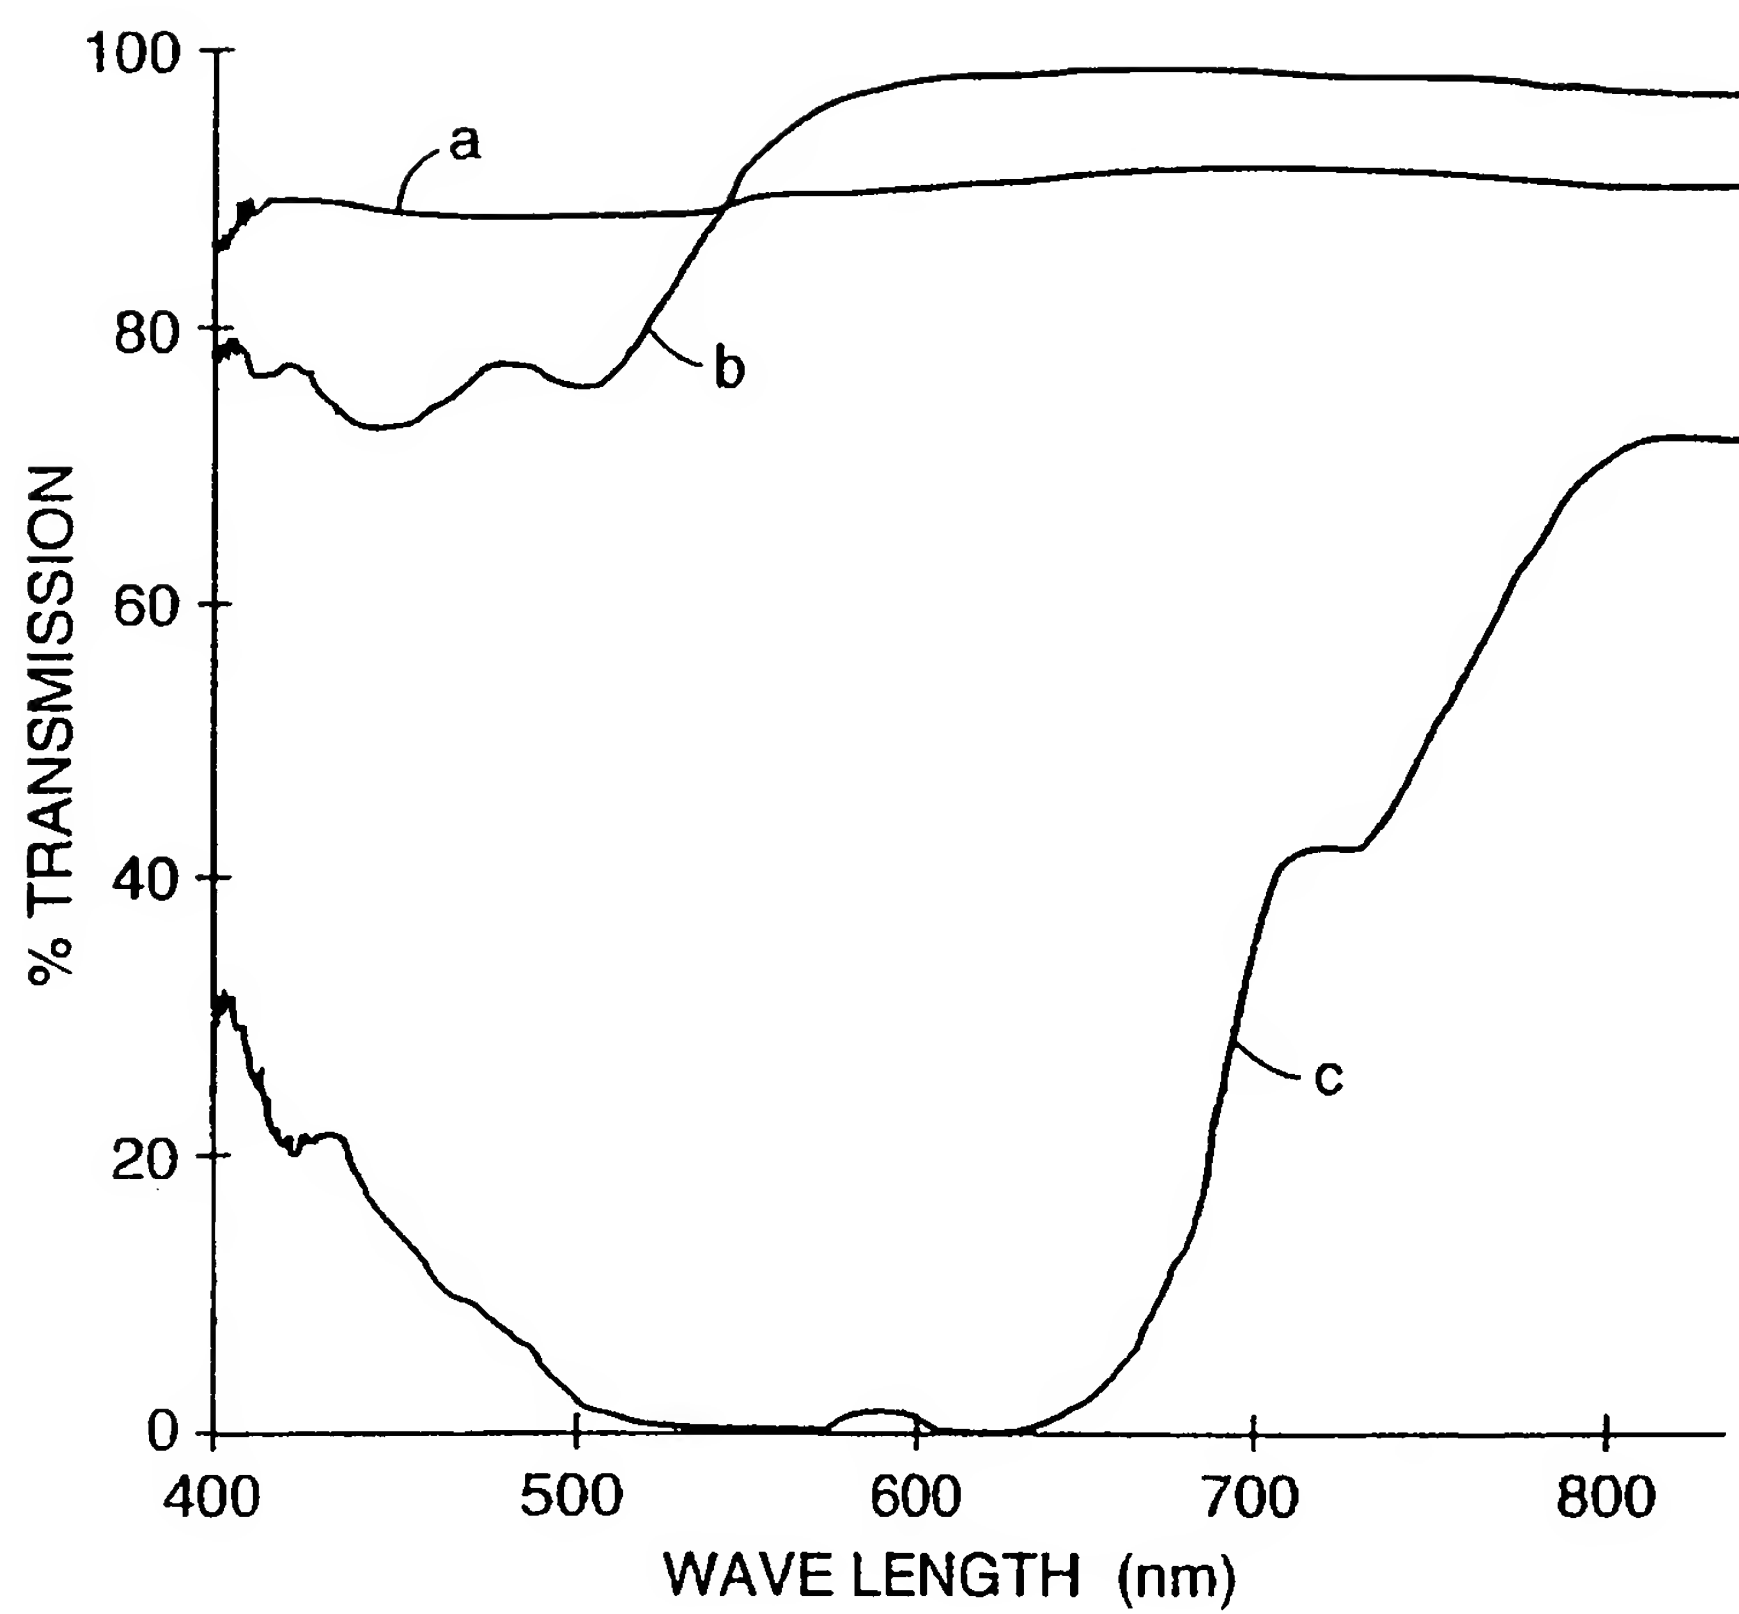
2/10

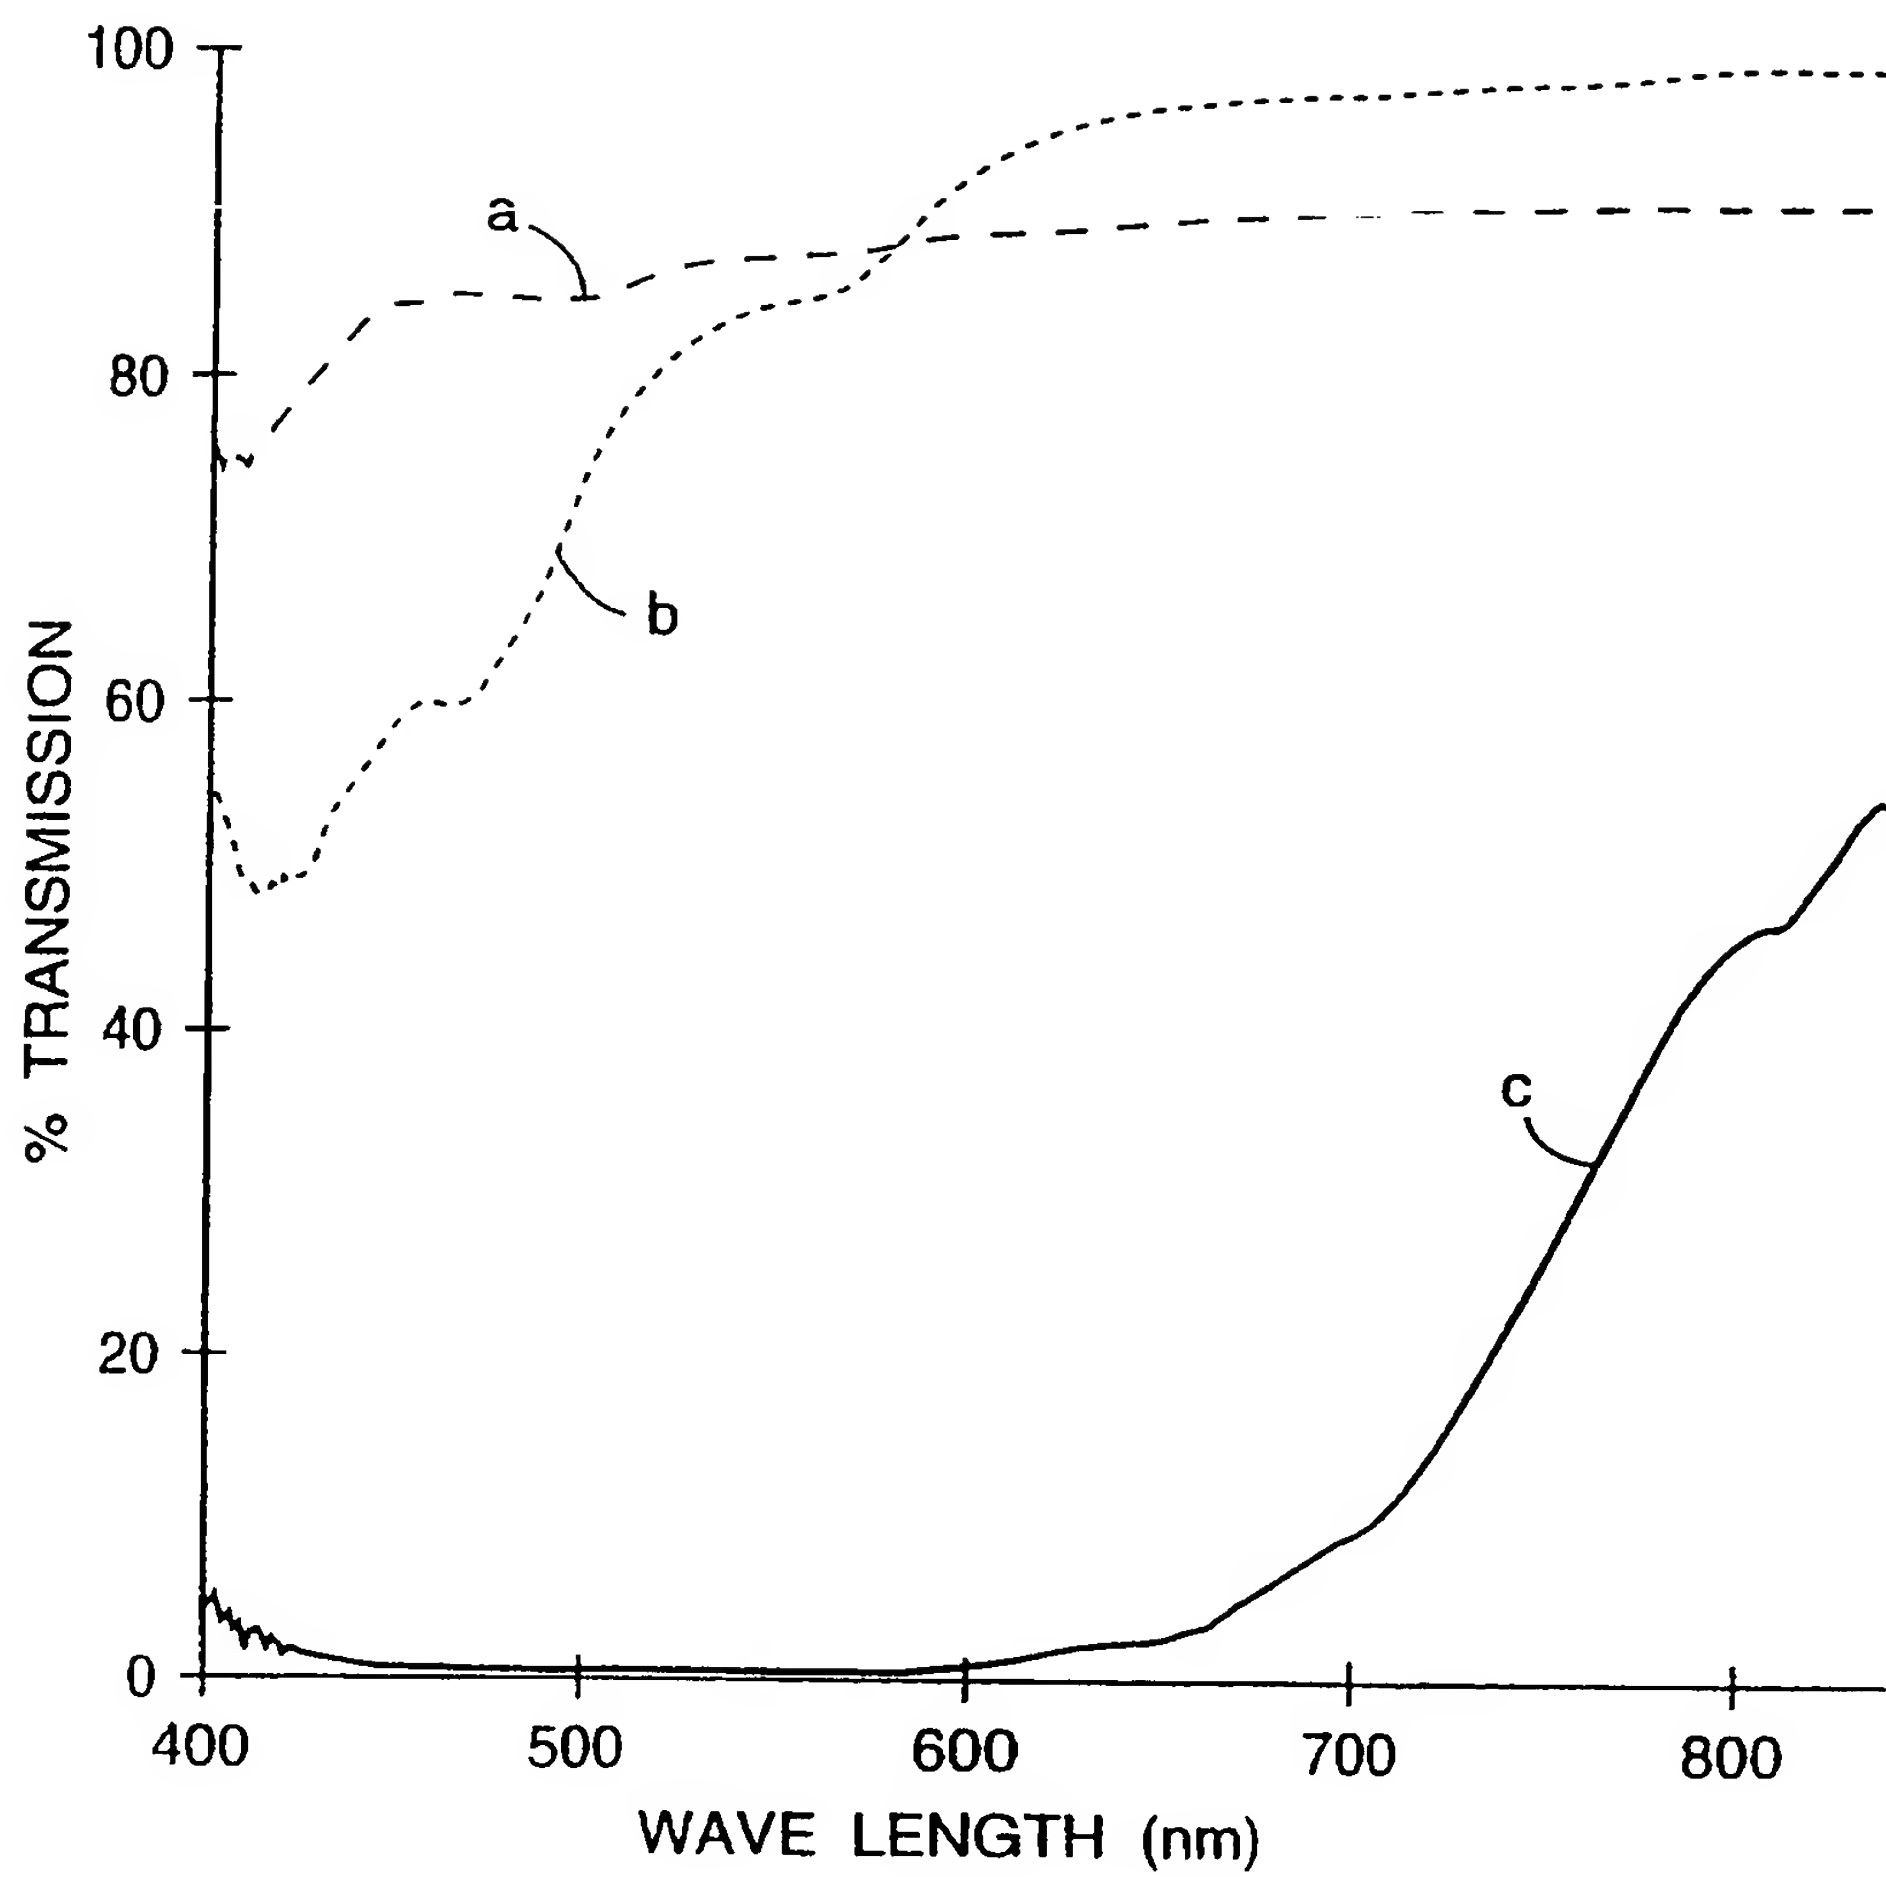
**Fig. 2****Fig. 15**

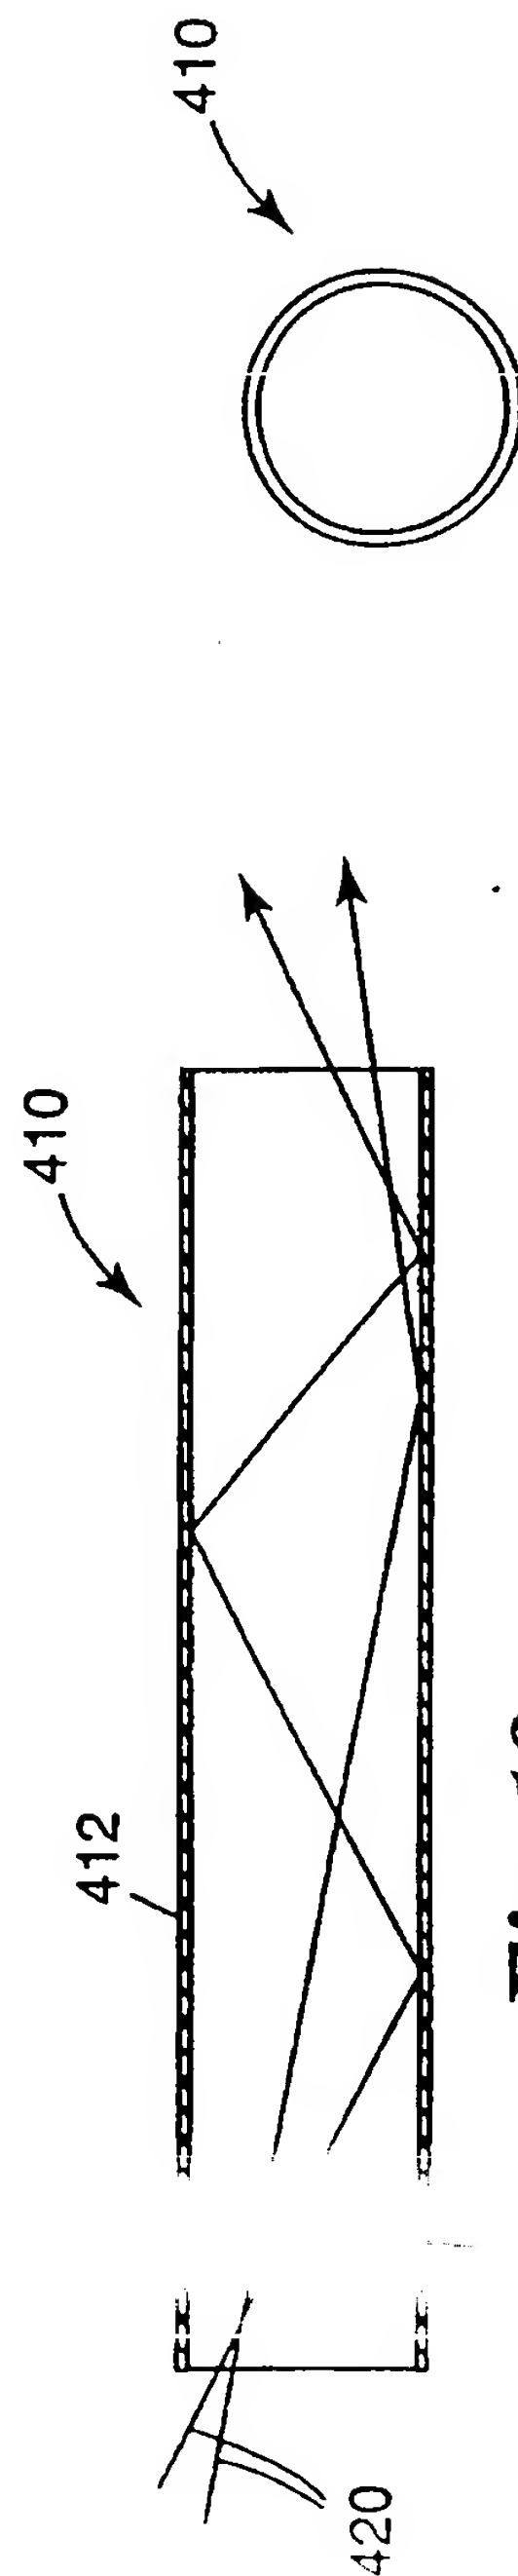
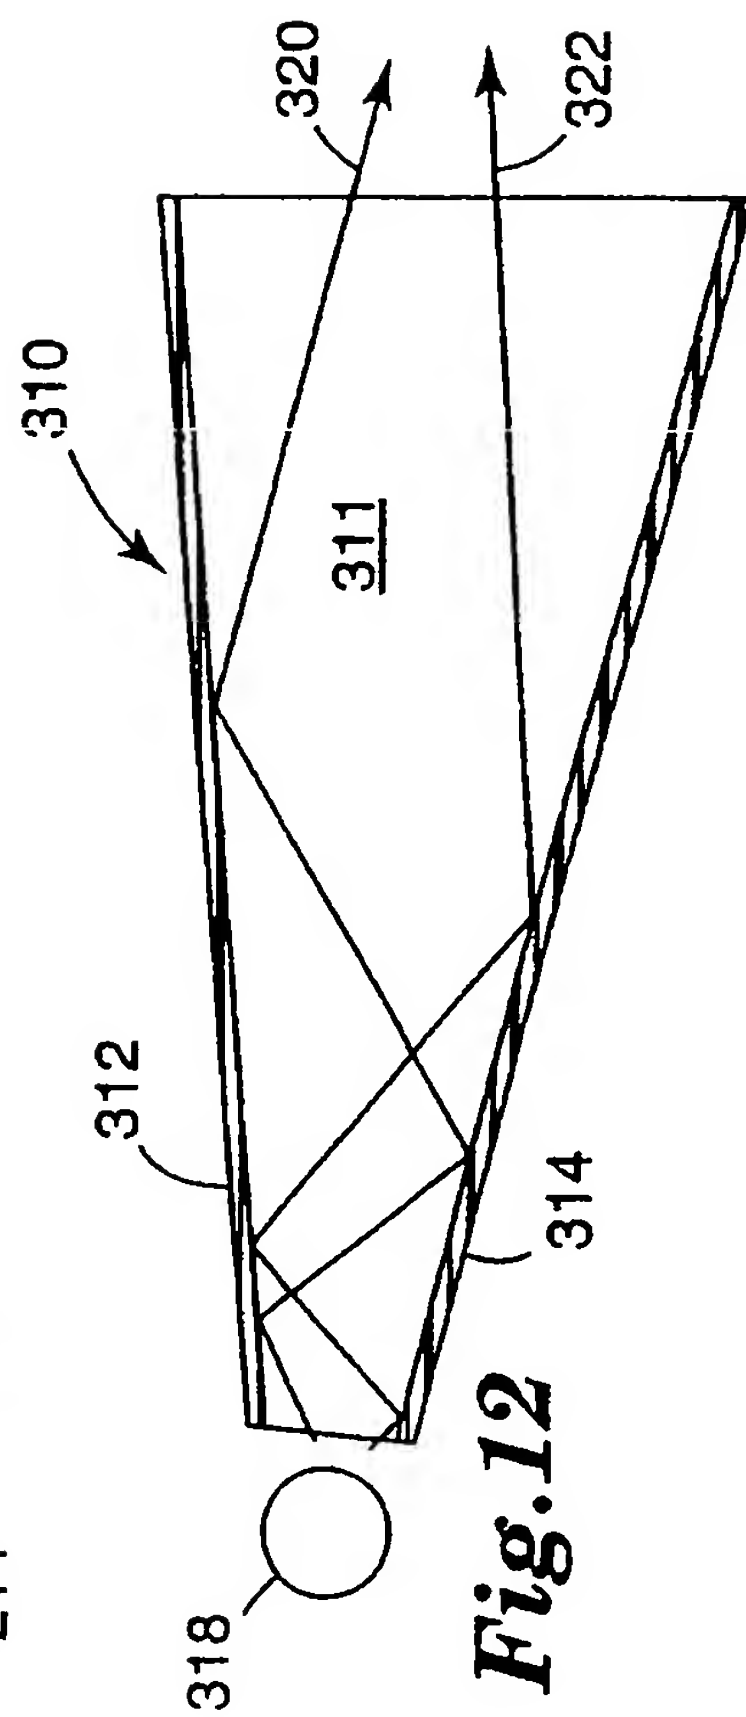
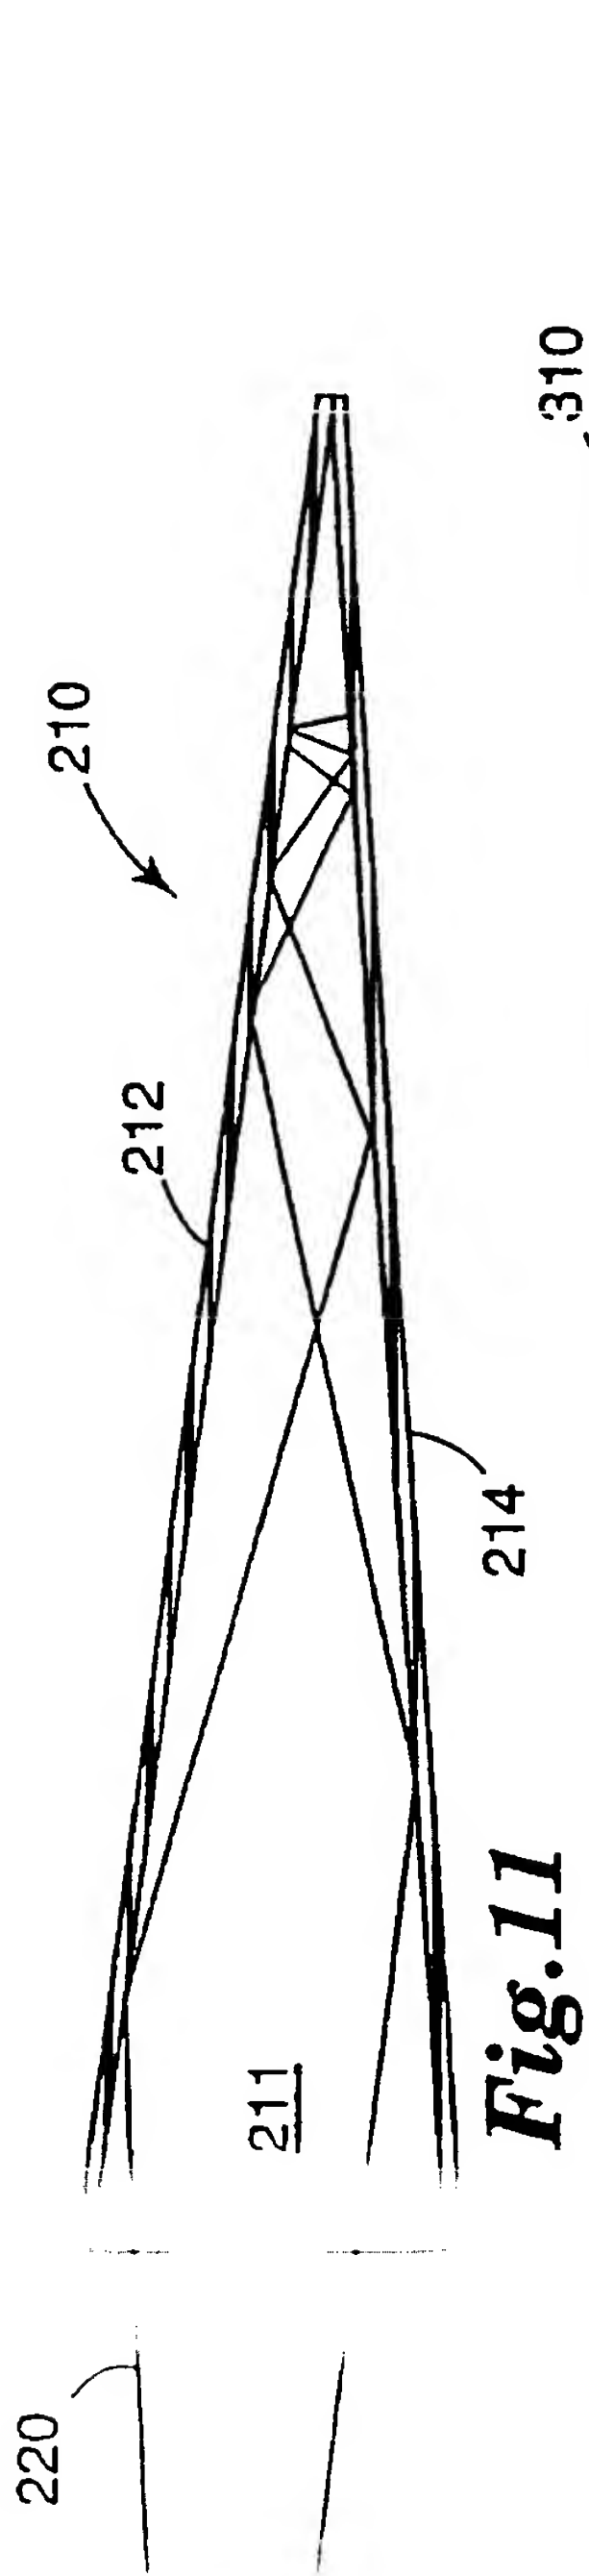
***Fig. 3***

**Fig. 4**

**Fig. 5**

**Fig. 6**

**Fig. 7a**



A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G02B1/10 G02B5/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,3 610 729 (H.G. ROGERS) 5 October 1971 see column 2, line 21 - column 3, line 17 ---	1-35
A	EP,A,0 404 463 (DOW CHEMICAL CO.) 27 December 1990 see page 6, line 42 - page 7, line 22 ---	1-35
A	EP,A,0 426 636 (MEARL CORP.) 8 May 1991 see the whole document ---	1-35
A	WO,A,94 10589 (DOW CHEMICAL CO.) 11 May 1994 see page 12, line 20 - page 13, line 23 -----	1-35

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

1 October 1996

25. 10. 96

Name and mailing address of the ISA

European Patent Office, P.O. Box 1, Patentstrasse
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Ex. 31 651 epo nl
Fax (+31-70) 340-3016

Authorized officer

Sarneel, A

Information on patent family members

International Application No

PCT/US 96/10338

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3610729	05-10-71	NONE	
EP-A-404463	27-12-90	AT-T- 139035	15-06-96
		AU-B- 622812	16-04-92
		AU-A- 5758790	03-01-91
		CA-A- 2019272	20-12-90
		CN-A,B 1048191	02-01-91
		DE-D- 69027254	11-07-96
		JP-A- 3041401	21-02-91
		NO-B- 178723	12-02-96
		US-A- 5122905	16-06-92
		US-A- 5122906	16-06-92
		US-A- 5486949	23-01-96
		US-A- 5262894	16-11-93
		US-A- 5278694	11-01-94
EP-A-426636	08-05-91	US-A- 5089318	18-02-92
		CA-A,C 2029012	01-05-91
		JP-A- 3208634	11-09-91
		JP-B- 8002618	17-01-96
WO-A-9410589	11-05-94	AU-A- 5322594	24-05-94
		CN-A- 1088511	29-06-94
		EP-A- 0666993	16-08-95
		JP-T- 8503312	09-04-96
		US-A- 5448404	05-09-95